



INSTALLATION MANUAL



Part 1 - Exchange LED module



WEDA HE X-FLIP



AC220-240V | 50/60Hz | IP20 | Die cast



Do no. operate with power supply connected.

1



Take the light off the track to the table.
Wear gloves to protect the reflector.

2



Unscrew the front ring.

3



Take out the reflector by turning it counterclockwise.

4



Remove the module by turning it counterclockwise.

5

Ensure correct positioning.



Insert and secure the new module by turning it clockwise.

6

Ensure correct positioning.



Install the reflector by turning clockwise.

7



Secure front ring and reattach to the track.

8



Suited for:

	Brand	Track Model	System
1	Global	XTS 4 & XTSE 4	3P
2	Stucchi	9000XX Series	3P
3	Eutrac	2510x	3P
4	Unipro	T32B	3P
5	Ivela	7501	3P

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.



INSTALLATION MANUAL




Part 2 - Install on the track



WEDA HE X-FLIP




AC220-240V | 50/60Hz | IP20 | Die cast




Do not operate with power supply connected.

1

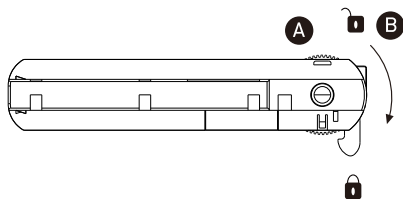


To mount the track adaptor into the track system, first check that the selector knob **A** is at OFF position and the adaptor lock **B** is disengaged.

2




When installing the adaptor into the track, ensure that it is orientated correctly.

3




Rotate adaptor lock **B** clockwise to connect the adaptor to the neutral circuit.

4

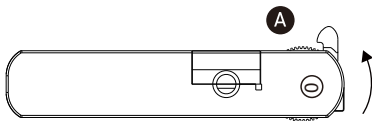


Rotate selector knob **A** to the position of desired circuit.

4a




Circuit 1: Rotate the knob **A** clockwise from the starting position OFF, to connect circuit 1.

4b




Circuit 2: Rotate the knob **A** counter-clockwise from the starting position OFF, to connect circuit 2.

4c

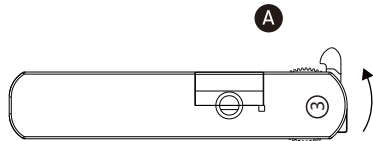

Circuit 1: Rotate the knob **A** clockwise from the starting position OFF, to connect circuit 3.

5

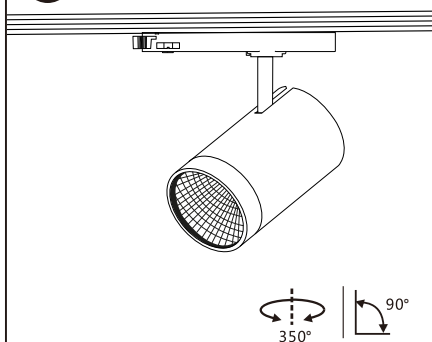

Suited for:

	Brand	Track Model	System
1	Global	XTS 4 & XTSE 4	3P
2	Stucchi	9000XX Series	3P
3	Eutrac	2510x	3P
4	Unipro	T32B	3P
5	Ivela	7501	3P

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.