


BALDR.



BALDR S.

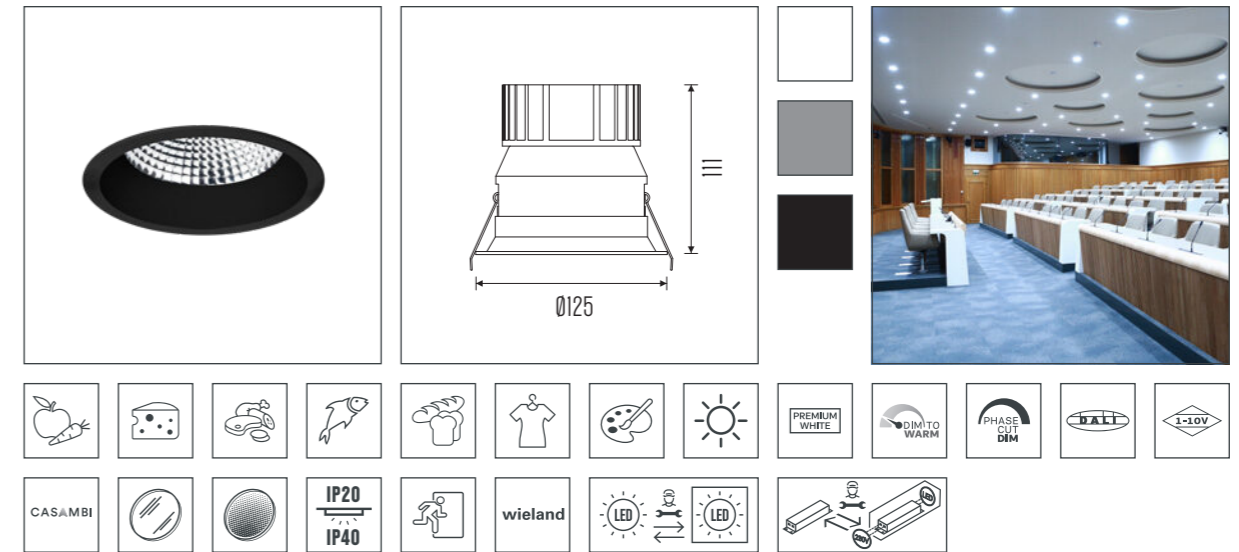

Cut-Out [mm]	: Ø115mm	Optic	: Facet Anodized Aluminum Reflector 50°
CCT [K]	: 2700K - 5700K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP40 from optical side
Luminous Flux [lm]	: max. 2500lm	Net Weight [kg]	: 0.50kg
System Power [W]	: max. 18.5W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 127lm/W		
Electrical Safety Class	: Class II		


[Go to full specs](#)



MULTIFUNCTIONAL ALL-ROUNDER.

This recessed downlight is used for multifunctional lighting. Perfect for workspaces en spaces where meetings and presentations are held. With the various options, such as dim-to-warm and tunable white you can smoothly change the colour temperature and therefore the atmosphere of the entire room.

BALDR L.

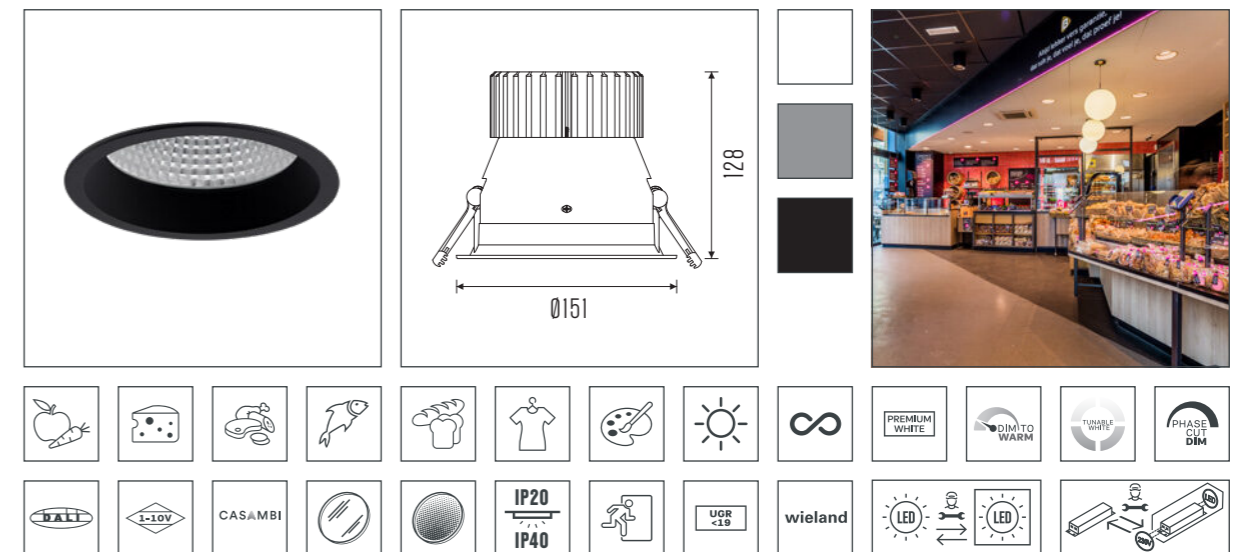

Cut-Out [mm]	: Ø140mm	Optic	: Facet Anodized Aluminum Reflector 45°
CCT [K]	: 2700K - 5700K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP40 from optical side
Luminous Flux [lm]	: max. 4500lm	Net Weight [kg]	: 0.86kg
System Power [W]	: max. 38.5W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 132lm/W		
Electrical Safety Class	: Class II		

[Go to full specs](#)

