


CHALLENGE.



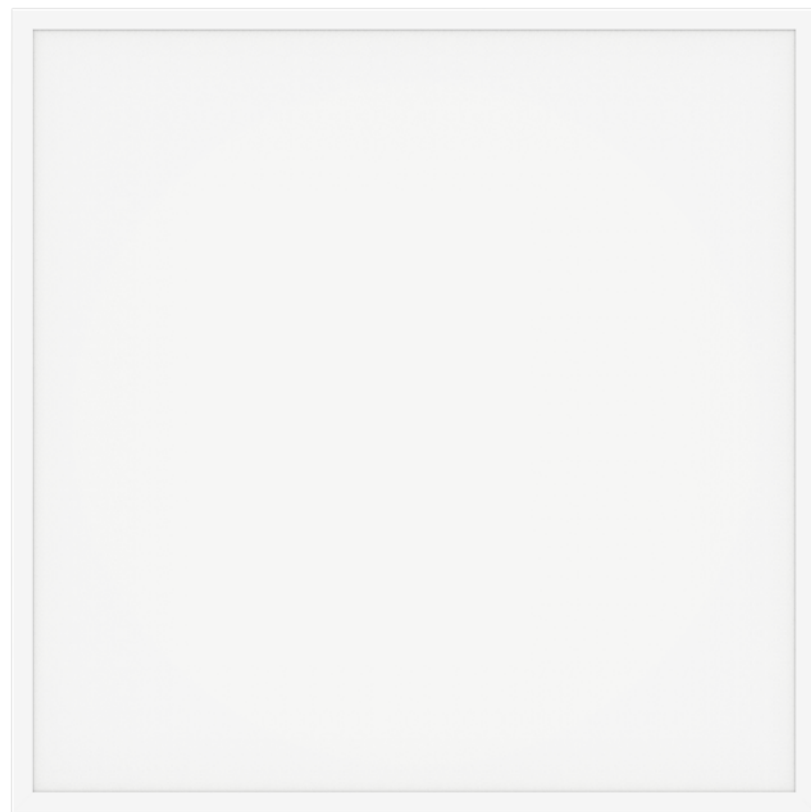


FULL FOCUS. ALWAYS AND EVERYWHERE.

The most universal luminaire, with UGR <19, for recessed, surfaced or suspended installation.

The Challenge provides the most uniform illumination in offices, showrooms, workshops, classrooms, conference rooms and lobbies.

CHALLENGE II 60X60.

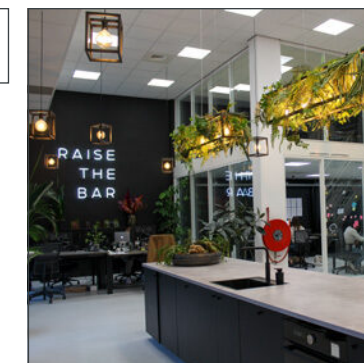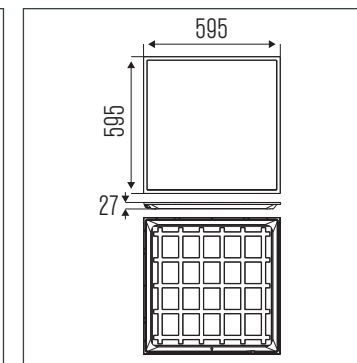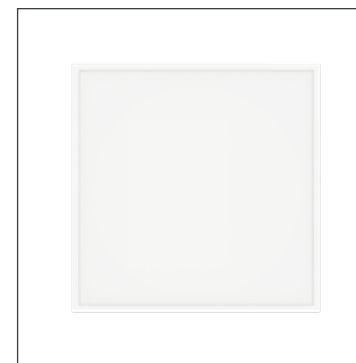



CCT [K] : 3000K, 4000K
CRI [Ra] : [Ra] >80
Chromaticity Tolerance : 5
Luminous Flux [lm] : 4200lm
System Power [W] : 30W
System Efficiency [lm/W] : 140lm/W
Electrical Safety Class : Class II

Optic : Microprismatic Diffuser 90°
Mains Voltage [VAc] : 220-240V / 50-60Hz
Ambient Temperature [°C] : 35°C
Ingress Protection [IP] : IP40
Net Weight [kg] : 3.1kg
Warranty [Y] : 5 years

[Go to full specs](#)



CHALLENGE 120X30.

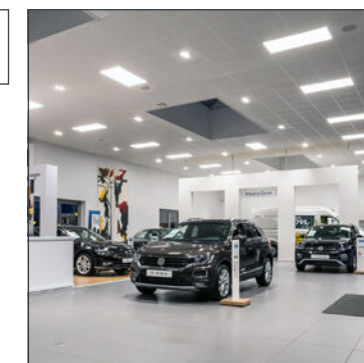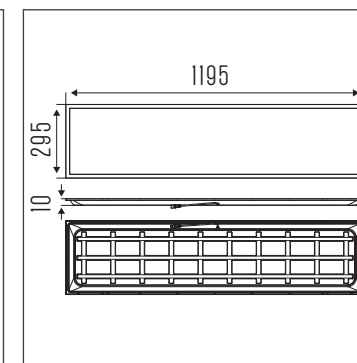

CCT [K] : 3000K - 4000K
CRI [Ra] : [Ra] >80
Chromaticity Tolerance : 5
Luminous Flux [lm] : 3600lm
System Power [W] : 36W
System Efficiency [lm/W] : 100lm/W
Electrical Safety Class : Class II

Optic : Microprismatic Diffuser 90°
Mains Voltage [VAc] : 220-240V / 50-60Hz
Ambient Temperature [°C] : 35°C
Ingress Protection [IP] : IP20
Net Weight [kg] : 3.2kg
Warranty [Y] : 5 years

[Go to full specs](#)



CHALLENGE. ACCESSORIES

Go to page



CHALLENGE SUSPENSION SET.




Go to full specs



Suspension set for Challenge.

CHALLENGE II 60X60 SURFACE MOUNTED FRAME.

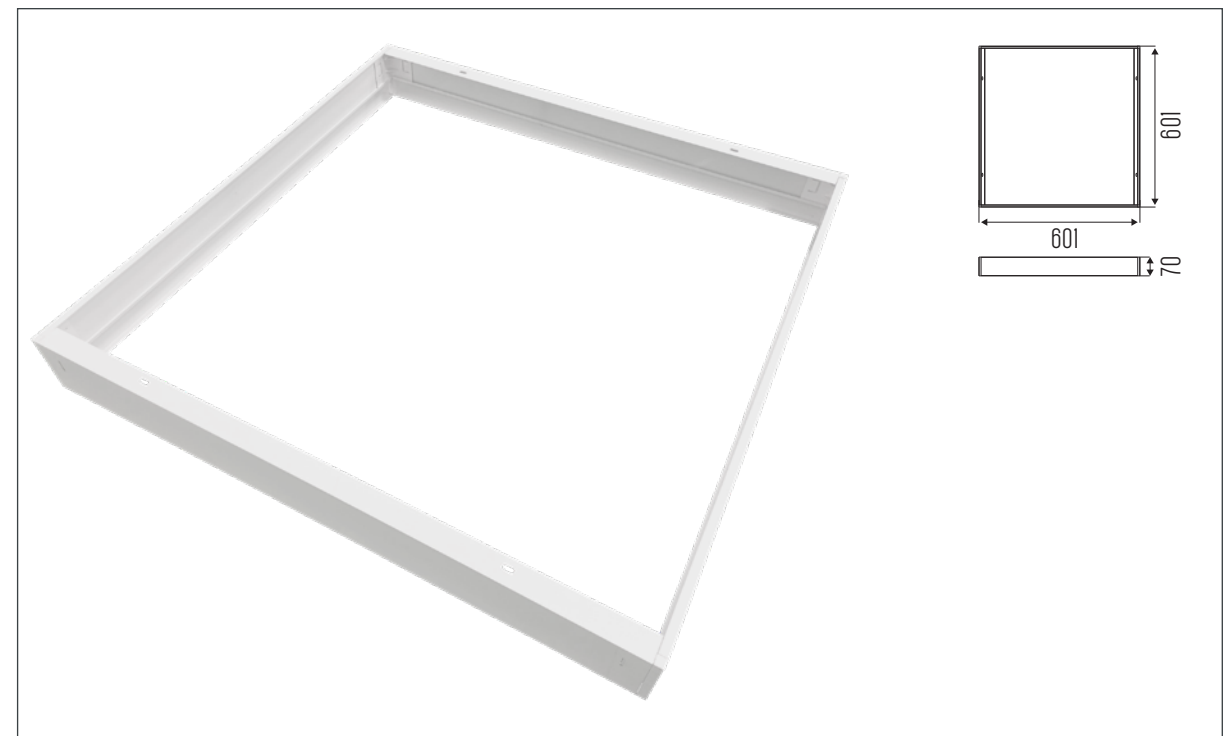


Go to full specs



Surface mounted frame for Challenge II 60x60. Frame dimensions: 601x601x70mm.

CHALLENGE 120X30 SURFACE MOUNTED FRAME.

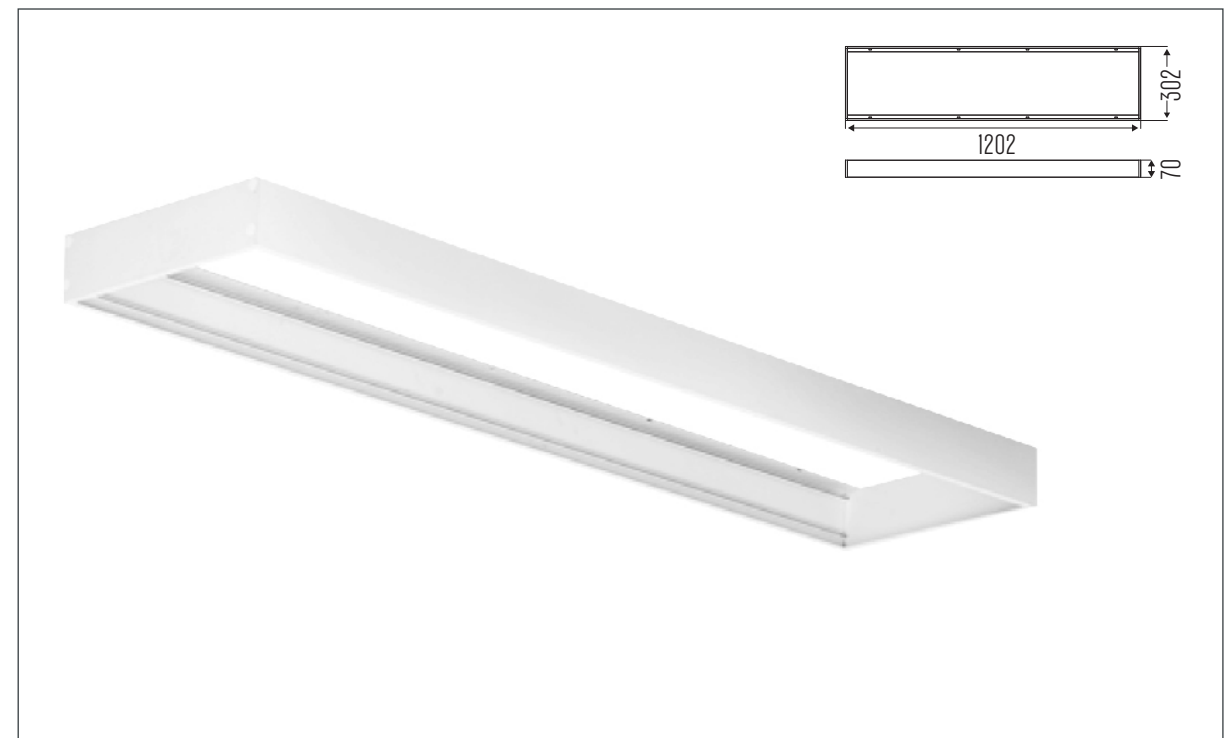

Go to full specs



Surface mounted frame for Challenge 120x30. Frame dimensions: 1202x302x70mm.