


CIMBRI.



SERVES ITS PURPOSE.

The Cimbri provides added value to spaces where people work and meet.
Think of reception areas in the retail, offices, hotels and the catering sector.
The luminaire is equipped with clear protective glass (IP65 from optical side).

CIMBRI.

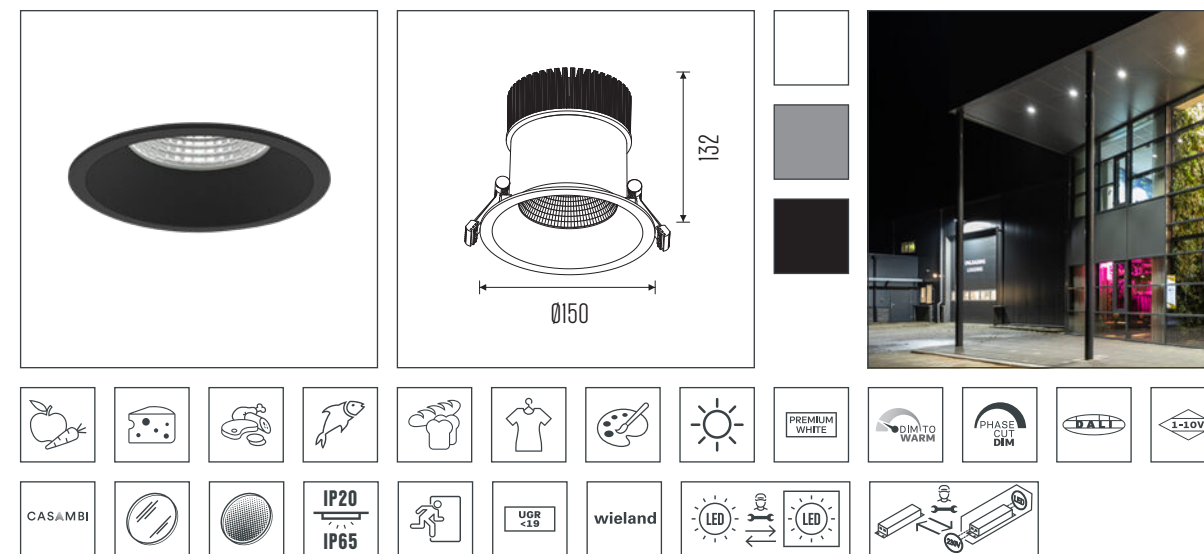


Cut-Out [mm]	: Ø140mm	Optic	: Facet Anodized Aluminum Reflector 15°, 30°, 45°, 60°
CCT [K]	: 2700K - 5700K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP65 from optical side
Luminous Flux [lm]	: max. 3500lm	Net Weight [kg]	: 1.00kg
System Power [W]	: max. 30W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 137lm/W		
Electrical Safety Class	: Class II		

Go to full specs



CIMBRI HE.

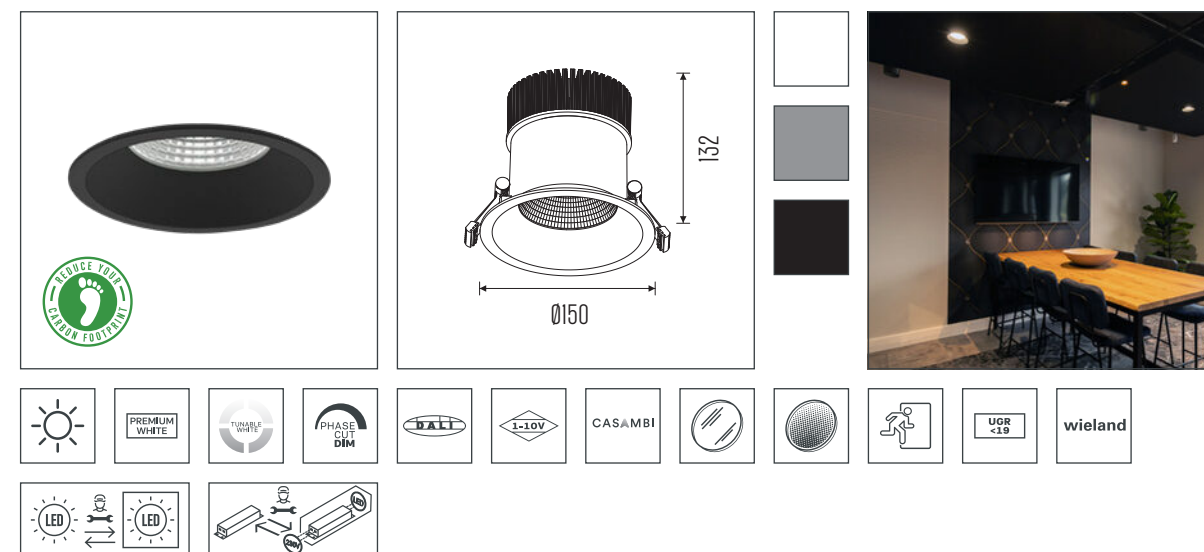

Cut-Out [mm]	: Ø140mm	Electrical Safety Class	: Class II
CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4500K PW	Optic	: Facet Metalized Reflector 20°, 30°, 40°, 60°
CRI [Ra]	: max. [RA] >98	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 2	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 3950lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 31W	Net Weight [kg]	: 1.00kg
System Efficiency [lm/W]	: max. 147lm/W	Warranty [Y]	: 5 years

Go to full specs

