


DONAR HE.



EFFORTLESS REPLACEMENT.

This fixed downlight series is designed to fit cut-outs with a diameter ranging from 110mm to 290mm. It makes the Donar HE the perfect solution for upgrading your existing lighting: maximize lighting efficiency while minimizing energy consumption without altering your existing ceiling cut-outs. Upgrade your lighting to the latest technology with ease.

DONAR S HE.

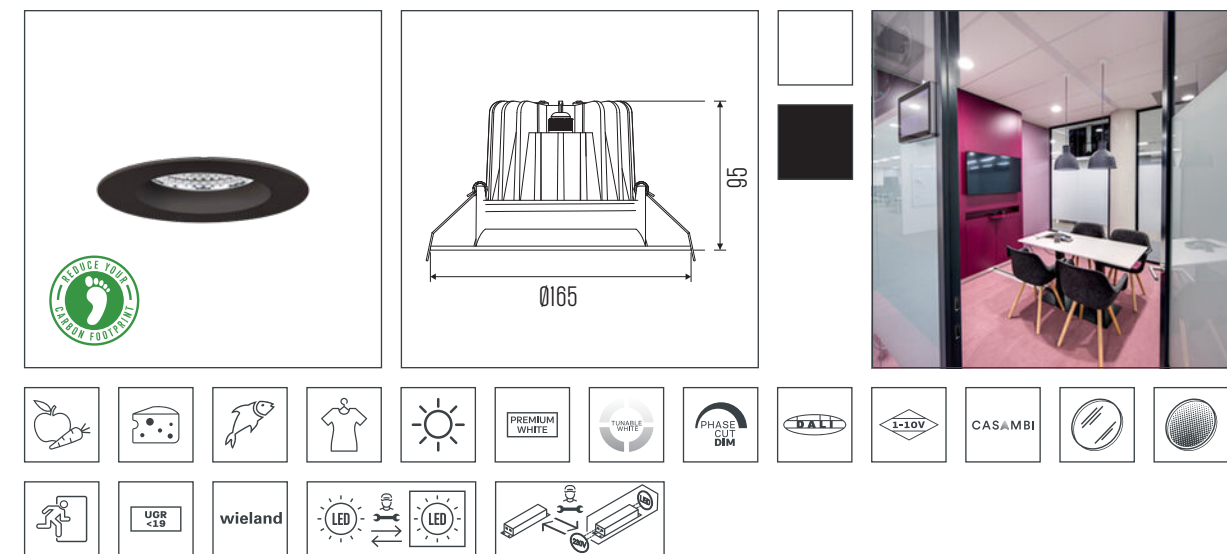


Cut-Out [mm]	: 110mm x 150mm	Electrical Safety Class	: Class II
CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4500K PW	Optic	: Facet Metalized Reflector 15°, 25°, 45°, 70°
CRI [Ra]	: max. [RA] >98	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 2	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 3100lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 23W	Net Weight [kg]	: 0.65kg
System Efficiency [lm/W]	: max. 142lm/W	Warranty [Y]	: 5 years

Go to full specs



DONAR S HE X-FLIP.

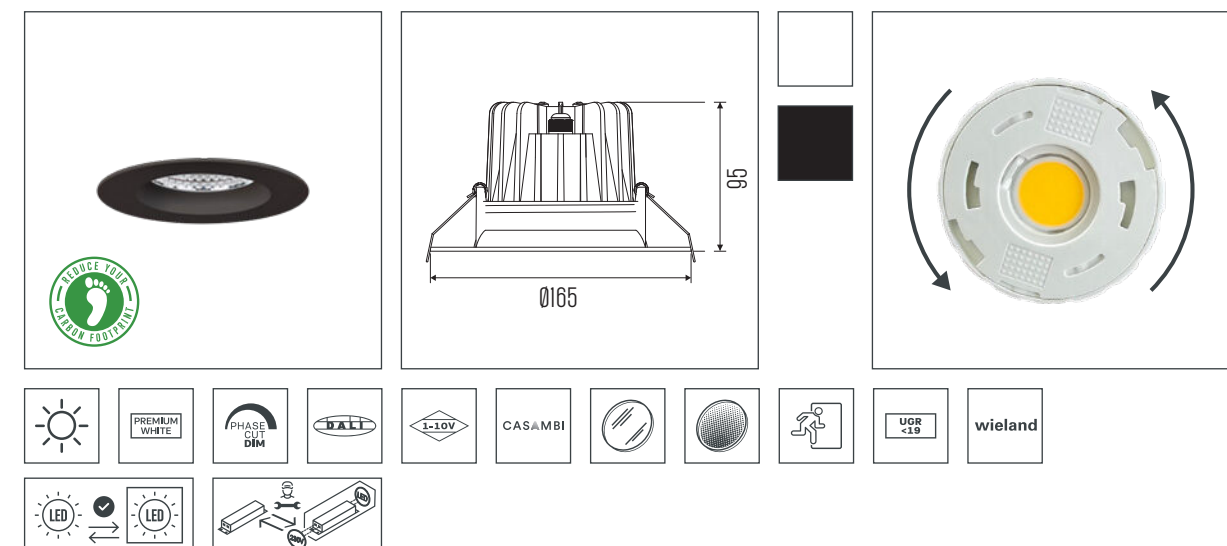


Cut-Out [mm]	: 110mm x 150mm	Electrical Safety Class	: Class II
CCT [K]	: 2700K, 3000K, 4000K, 3000K PW, 4000K PW	Optic	: Facet Metalized Reflector 15°, 25°, 45°, 70°
CRI [Ra]	: max. [RA] >98	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 2	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 2600lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 19W	Net Weight [kg]	: 0.65kg
System Efficiency [lm/W]	: max. 137lm/W	Warranty [Y]	: 5 years

Go to full specs



DONAR M HE.

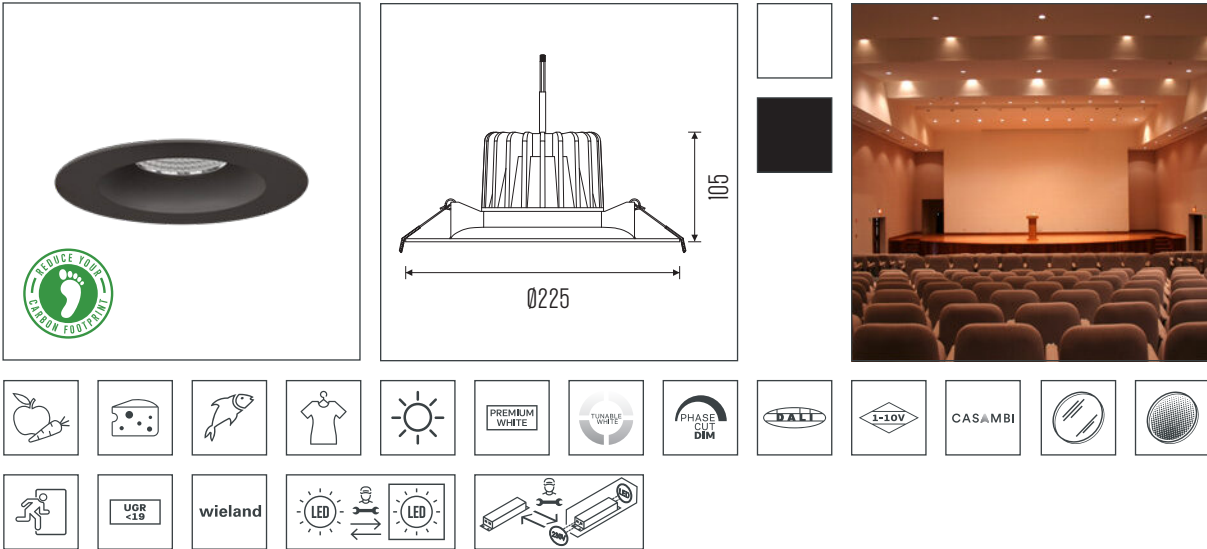


Cut-Out [mm]	: 155mm x 215mm	Electrical Safety Class	: Class II
CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4500K PW	Optic	: Facet Metalized Reflector 20°, 30°, 40°, 60°
CRI [Ra]	: max. [RA] >98	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 2	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 3100lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 23W	Net Weight [kg]	: 0.80kg
System Efficiency [lm/W]	: max. 142lm/W	Warranty [Y]	: 5 years

Go to full specs



DONAR M HE X-FLIP.

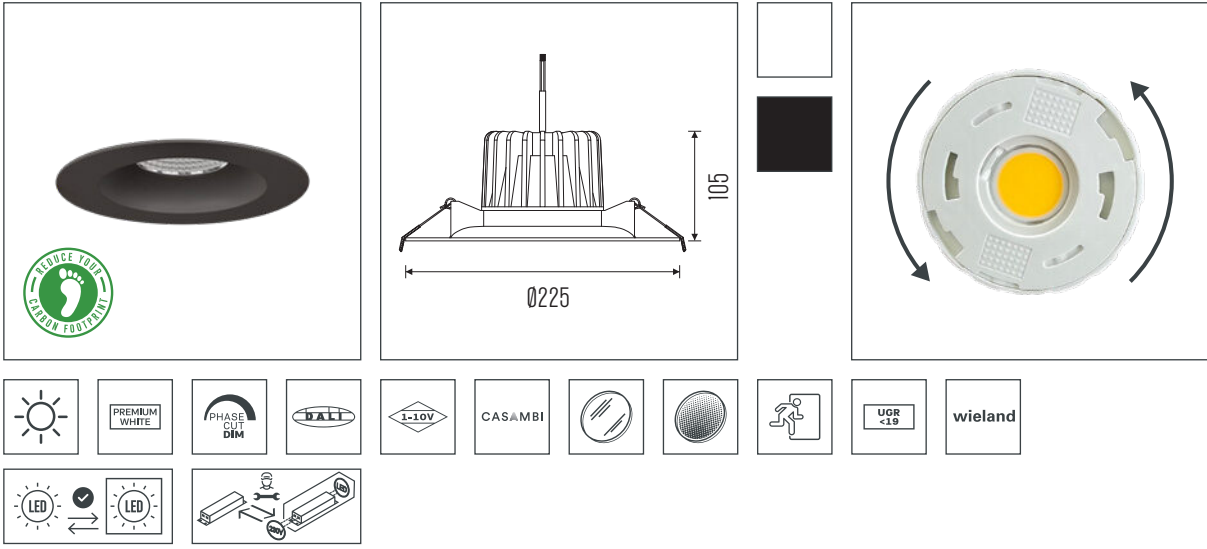


Cut-Out [mm]	: 155mm x 215mm	Electrical Safety Class	: Class II
CCT [K]	: 2700K, 3000K, 4000K, 3000K PW, 4000K PW	Optic	: Facet Metalized Reflector 15°, 25°, 45°, 70°
CRI [Ra]	: max. [RA] >98	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 2	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 2600lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 19W	Net Weight [kg]	: 0.80kg
System Efficiency [lm/W]	: max. 137lm/W	Warranty [Y]	: 5 years

Go to full specs



DONAR L HE.

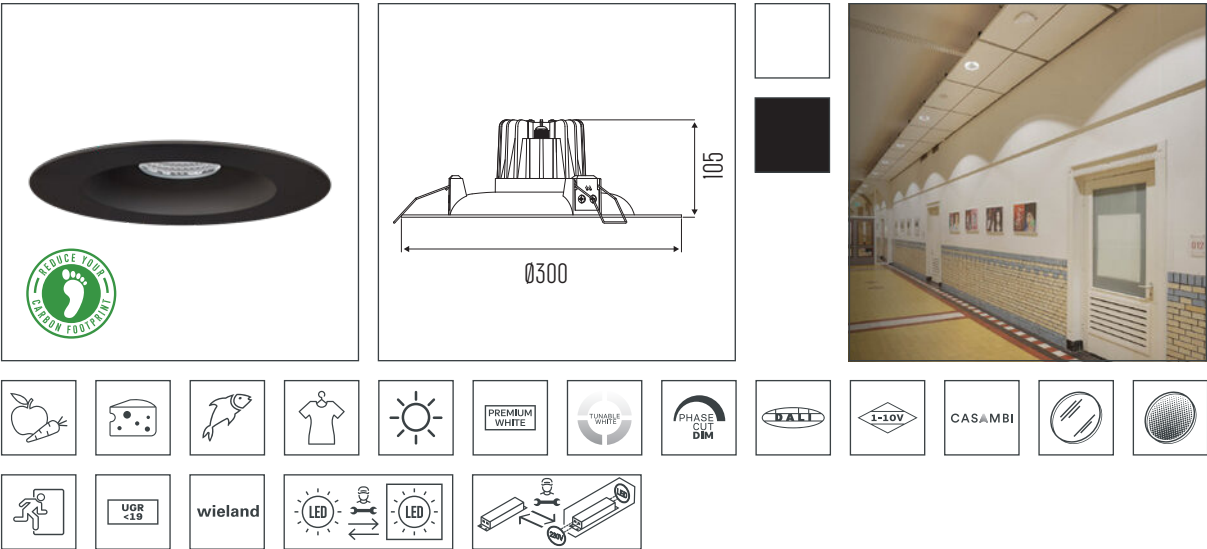


Cut-Out [mm]	: 210mm x 290mm	Electrical Safety Class	: Class II
CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4500K PW	Optic	: Facet Metalized Reflector 15°, 25°, 45°, 70°
CRI [Ra]	: max. [RA] >98	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 2	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 4000lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 31W	Net Weight [kg]	: 1.20kg
System Efficiency [lm/W]	: max. 142lm/W	Warranty [Y]	: 5 years

Go to full specs



DONAR L HE X-FLIP.

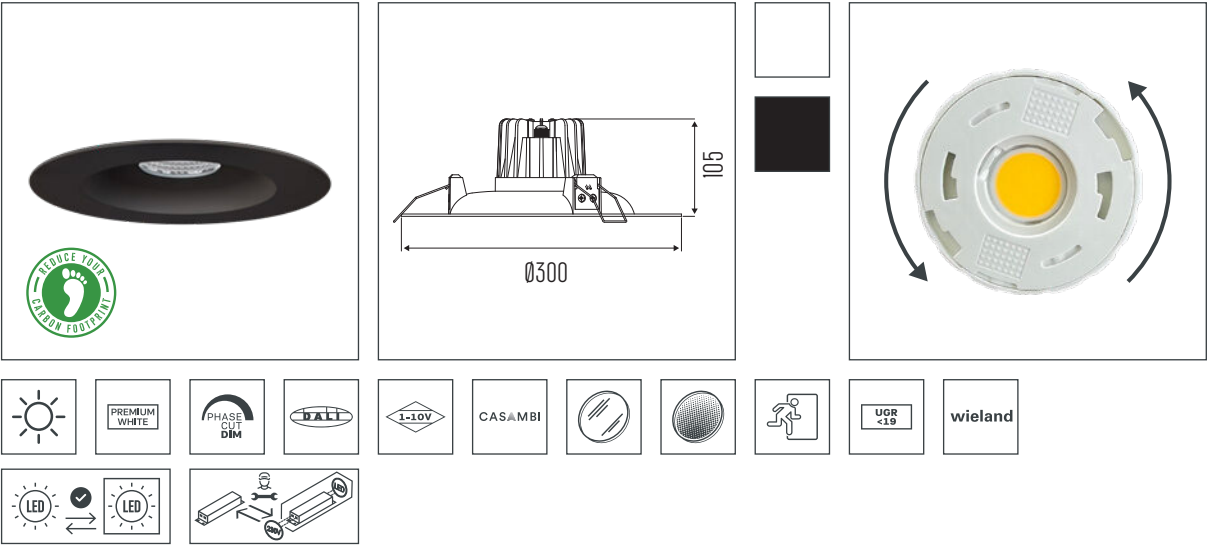

Cut-Out [mm]	: 210mm x 290mm	Electrical Safety Class	: Class II
CCT [K]	: 2700K, 3000K, 4000K, 3000K PW, 4000K PW	Optic	: Facet Metalized Reflector 15°, 25°, 45°, 70°
CRI [Ra]	: max. [RA] >98	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 2	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 2600lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 19W	Net Weight [kg]	: 1.20kg
System Efficiency [lm/W]	: max. 137lm/W	Warranty [Y]	: 5 years

Go to full specs

