



FENRIR.

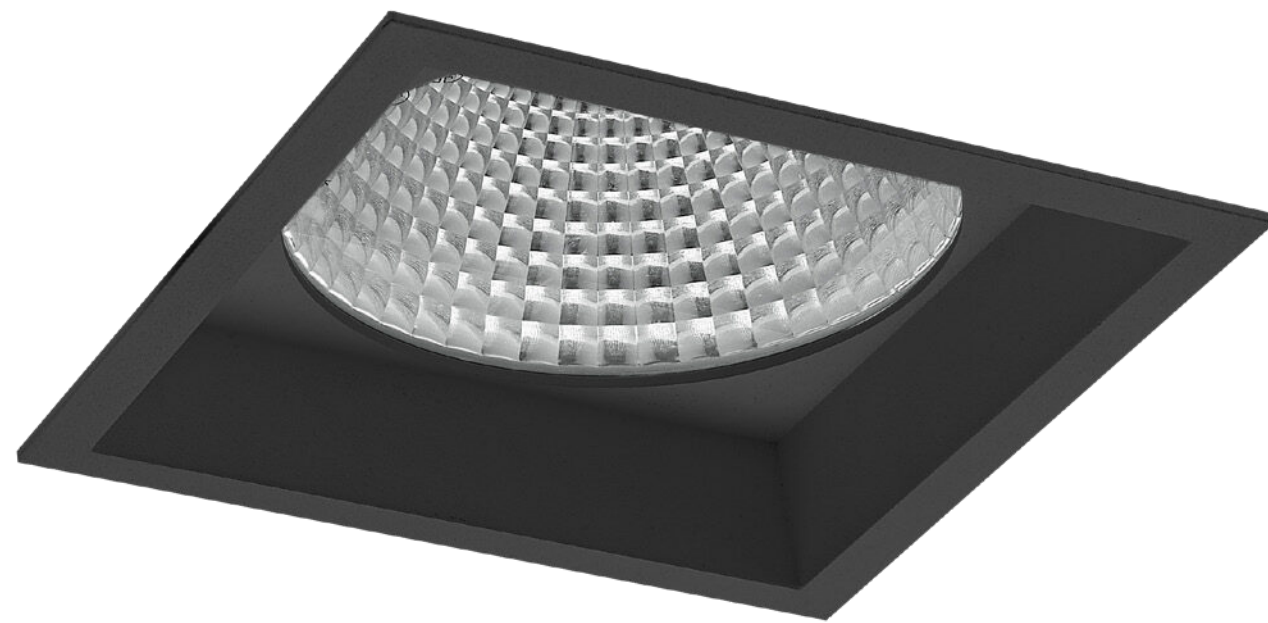

**SQUARELY
PERFECT.**

The latest technology, combined with an efficient design for the lighting of offices, reception areas and corridors. The light source is deeper in the fixture. This makes a space more luxurious, elegant and part of the whole environment. The fixture is standardly equipped with a clear glass.

FENRIR S.

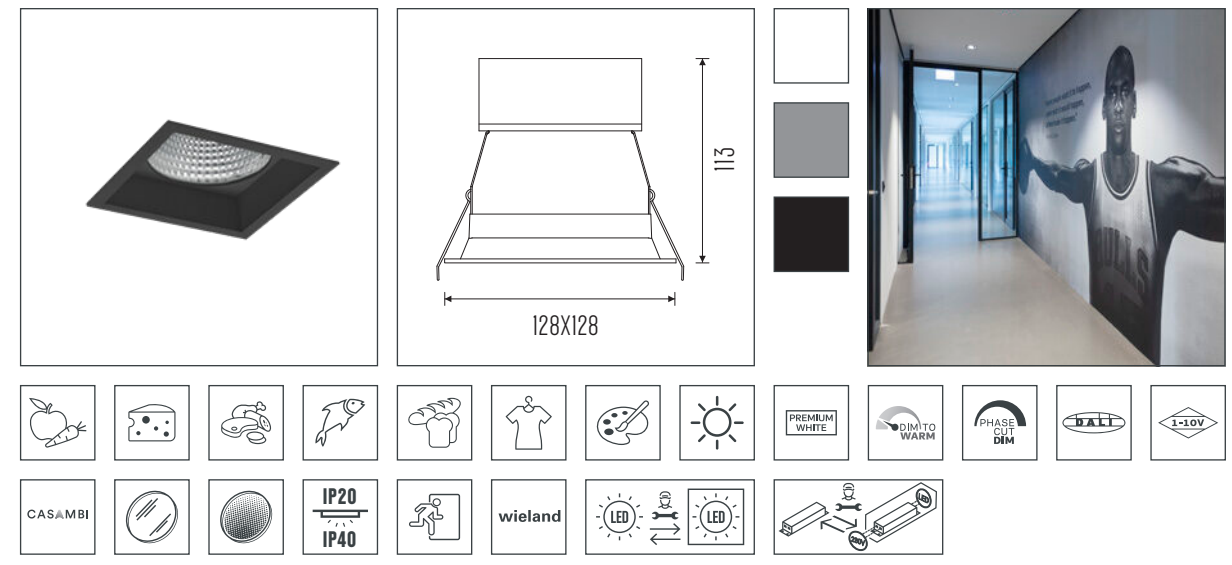


Cut-Out [mm]	: 116mm x 116mm	Optic	: Facet Anodized Aluminum Reflector 50°
CCT [K]	: 2700K - 5700K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP40 from optical side
Luminous Flux [lm]	: max. 2500lm	Net Weight [kg]	: 0.67kg
System Power [W]	: max. 18.5W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 127lm/W		
Electrical Safety Class	: Class II		

Go to full specs



FENRIR L.

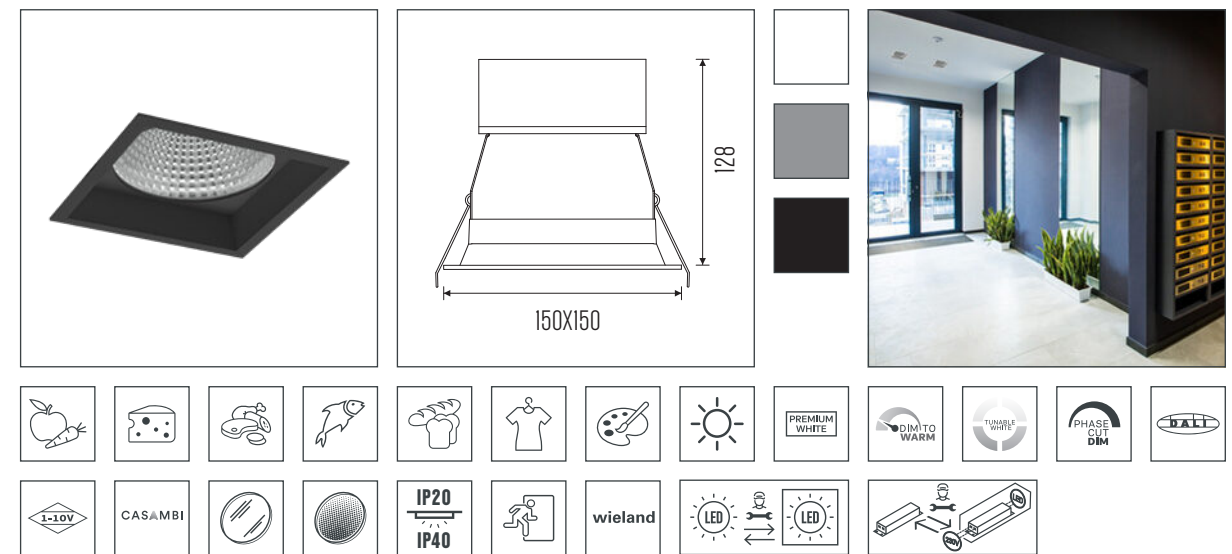

Cut-Out [mm]	: 140mm x 140mm	Optic	: Facet Anodized Aluminum Reflector 45°
CCT [K]	: 2700K - 5700K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP40 from optical side
Luminous Flux [lm]	: max. 4500lm	Net Weight [kg]	: 0.86kg
System Power [W]	: max. 38.5W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 132lm/W		
Electrical Safety Class	: Class II		

Go to full specs

