


# FORSITE PE.



## STRAIGHT AHEAD.

The suspended version of the Forsite TR. A linear luminaire with everything you need to make a difference in larger areas. Straightforward, powerful and energy-efficient. Choose from a wide beam angle range and the right light colour temperature to create the perfect lighting conditions. The suspension parts and ceiling cap have to be ordered separately.

## FORSITE 865 PE.

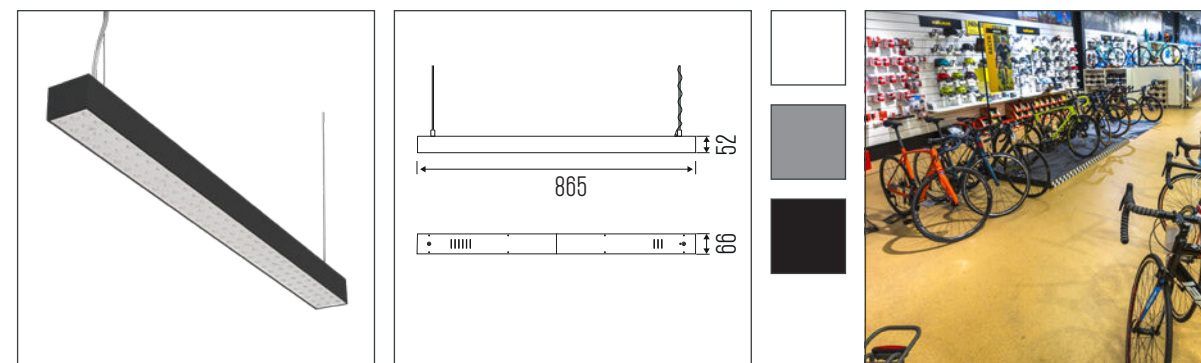


|                          |                      |                          |                                              |
|--------------------------|----------------------|--------------------------|----------------------------------------------|
| CCT [K]                  | : 3000K, 4000K       | Optic                    | : Lens - Double Assymetric, 30°, 60° and 90° |
| CRI [Ra]                 | : [Ra] >90, [Ra] >80 | Mains Voltage [VAc]      | : 220-240V / 50-60Hz                         |
| Chromaticity Tolerance   | : 3                  | Ambient Temperature [°C] | : 35°C                                       |
| Luminous Flux [lm]       | : max. 7300lm        | Ingress Protection [IP]  | : IP20                                       |
| System Power [W]         | : max. 52W           | Net Weight [kg]          | : 2.60kg                                     |
| System Efficiency [lm/W] | : max. 141lm/W       | Warranty [Y]             | : 5 years                                    |
| Electrical Safety Class  | : Class I            |                          |                                              |

[Go to full specs](#)



## FORSITE 1150 PE.

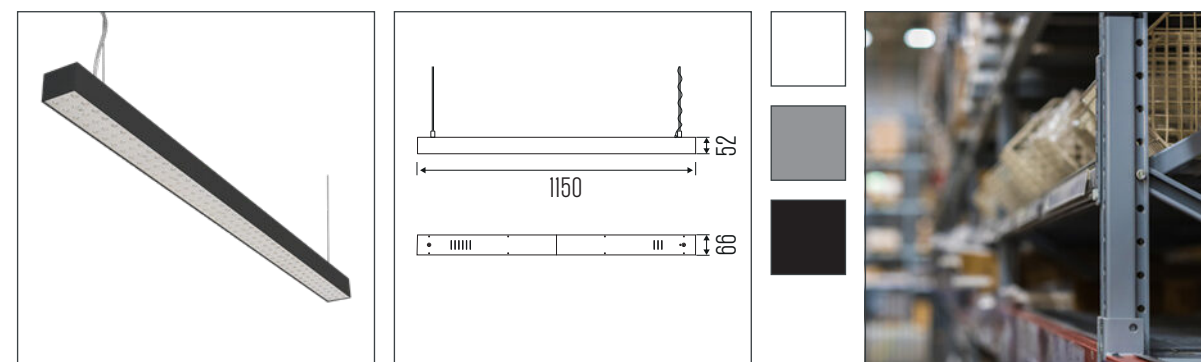

|                          |                      |                          |                                              |
|--------------------------|----------------------|--------------------------|----------------------------------------------|
| CCT [K]                  | : 3000K, 4000K       | Optic                    | : Lens - Double Assymetric, 30°, 60° and 90° |
| CRI [Ra]                 | : [Ra] >90, [Ra] >80 | Mains Voltage [VAc]      | : 220-240V / 50-60Hz                         |
| Chromaticity Tolerance   | : 3                  | Ambient Temperature [°C] | : 35°C                                       |
| Luminous Flux [lm]       | : max. 9750lm        | Ingress Protection [IP]  | : IP20                                       |
| System Power [W]         | : max. 68W           | Net Weight [kg]          | : 3.40kg                                     |
| System Efficiency [lm/W] | : max. 143lm/W       | Warranty [Y]             | : 5 years                                    |
| Electrical Safety Class  | : Class I            |                          |                                              |

[Go to full specs](#)

