


# SANA.



## TURN AND TILT.

This banana spotlight can be integrated in any retail setting or showroom, thanks to its flexibility in terms of rotation and tilting. The luminaire can be used as a downlight above neutral areas, and also as a spot above exhibited objects. This gives you the freedom to adjust the Sana according to your specific requirements.


### SANA S HE.

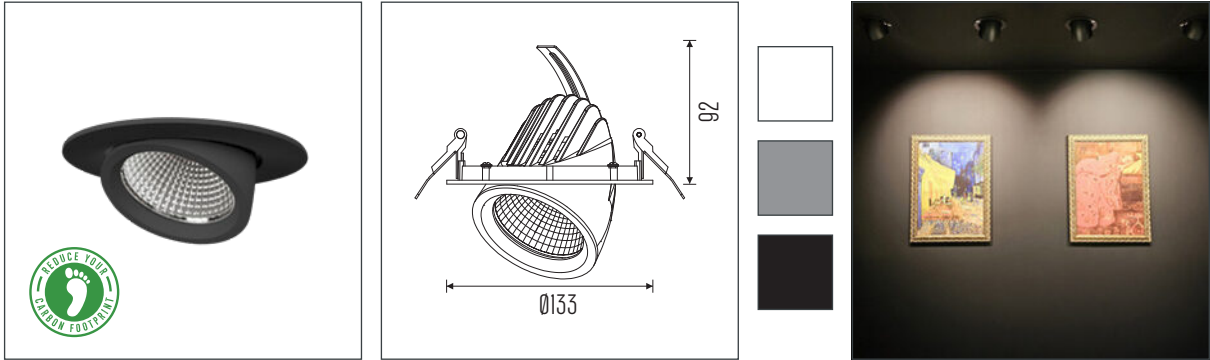


|                          |                                                            |                          |                                                |
|--------------------------|------------------------------------------------------------|--------------------------|------------------------------------------------|
| Adjustability            | : 350° rotational and 50° tiltable                         | Electrical Safety Class  | : Class II                                     |
| Cut-Out [mm]             | : Ø 125mm                                                  | Optic                    | : Facet Metalized Reflector 15°, 25°, 40°, 65° |
| CCT [K]                  | : 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4500K PW | Mains Voltage [VAc]      | : 220-240V / 50-60Hz                           |
| CRI [Ra]                 | : max. [RA] >98                                            | Ambient Temperature [°C] | : 35°C                                         |
| Chromaticity Tolerance   | : 2                                                        | Ingress Protection [IP]  | : IP20                                         |
| Luminous Flux [lm]       | : max. 2700lm                                              | Net Weight [kg]          | : 0.65kg                                       |
| System Power [W]         | : max. 19W                                                 | Warranty [Y]             | : 5 years                                      |
| System Efficiency [lm/W] | : max. 142lm/W                                             |                          |                                                |




### SANA M HE.

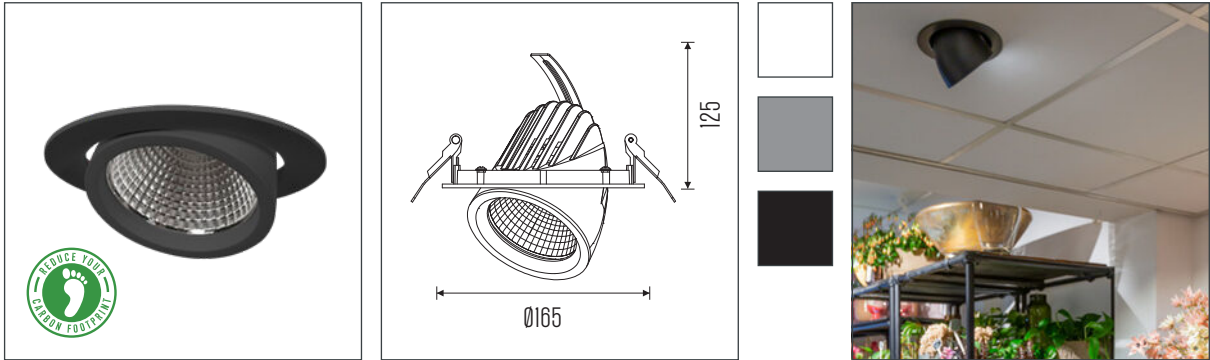

|                          |                                                            |                          |                                                |
|--------------------------|------------------------------------------------------------|--------------------------|------------------------------------------------|
| Adjustability            | : 350° rotational and 50° tiltable                         | Electrical Safety Class  | : Class II                                     |
| Cut-Out [mm]             | : Ø 155mm                                                  | Optic                    | : Facet Metalized Reflector 20°, 30°, 40°, 60° |
| CCT [K]                  | : 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4000K PW | Mains Voltage [VAc]      | : 220-240V / 50-60Hz                           |
| CRI [Ra]                 | : max. [RA] >98                                            | Ambient Temperature [°C] | : 35°C                                         |
| Chromaticity Tolerance   | : 2                                                        | Ingress Protection [IP]  | : IP20                                         |
| Luminous Flux [lm]       | : max. 5200lm                                              | Net Weight [kg]          | : 0.88kg                                       |
| System Power [W]         | : max. 40W                                                 | Warranty [Y]             | : 5 years                                      |
| System Efficiency [lm/W] | : max. 147lm/W                                             |                          |                                                |




SANA L HE.

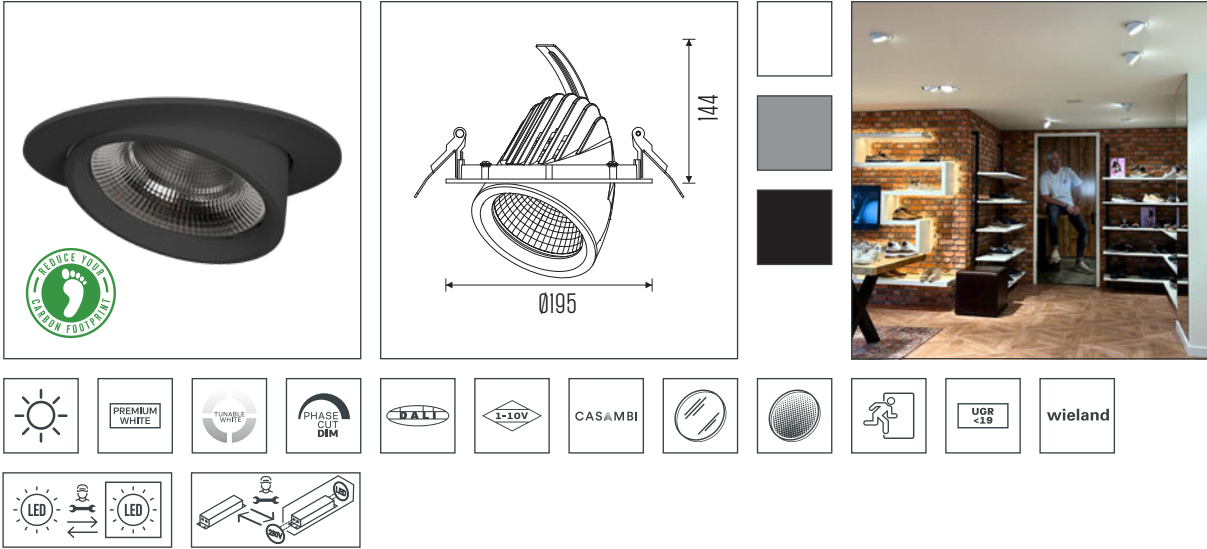

|                          |                                                               |                          |                                                        |
|--------------------------|---------------------------------------------------------------|--------------------------|--------------------------------------------------------|
| Adjustability            | : 350° rotational and 50° tiltable                            | Electrical Safety Class  | : Class II                                             |
| Cut-Out [mm]             | : Ø 185mm                                                     | Optic                    | : Facet Metalized Reflector<br>15°, 24°, 36°, 45°, 60° |
| CCT [K]                  | : 2700K, 3000K, 3500K, 4000K,<br>3000K PW, 3500K PW, 4500K PW | Mains Voltage [VAc]      | : 220-240V / 50-60Hz                                   |
| CRI [Ra]                 | : max. [RA] >98                                               | Ambient Temperature [°C] | : 35°C                                                 |
| Chromaticity Tolerance   | : 2                                                           | Ingress Protection [IP]  | : IP20                                                 |
| Luminous Flux [lm]       | : max. 5550lm                                                 | Net Weight [kg]          | : 1.45kg                                               |
| System Power [W]         | : max. 46.5W                                                  | Warranty [Y]             | : 5 years                                              |
| System Efficiency [lm/W] | : max. 147lm/W                                                |                          |                                                        |

Go to full specs

SANA M.

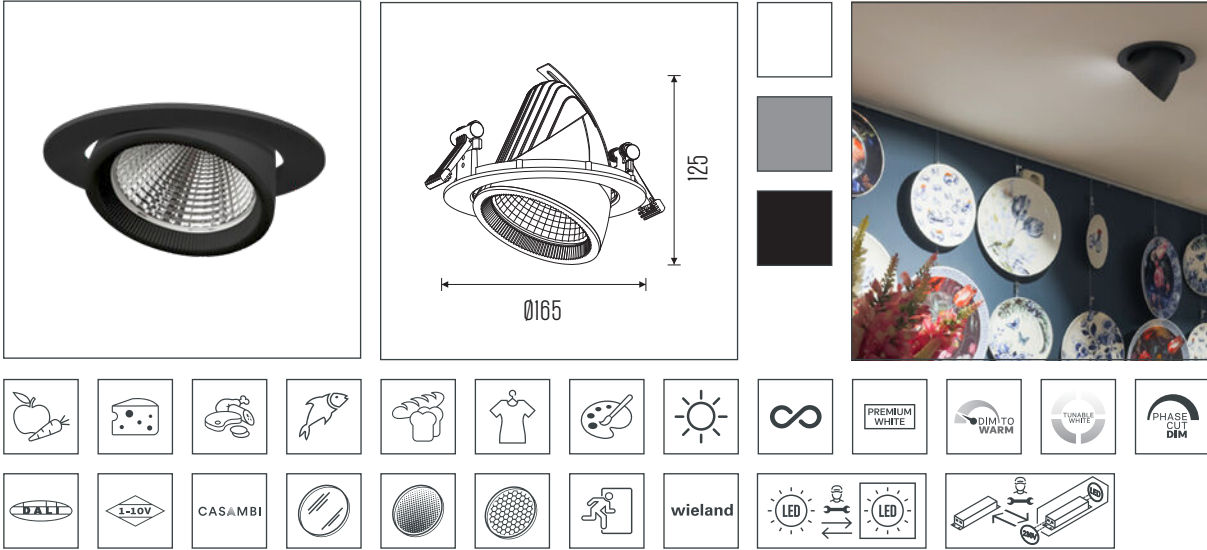

|                          |                                    |                          |                                                           |
|--------------------------|------------------------------------|--------------------------|-----------------------------------------------------------|
| Adjustability            | : 350° rotational and 50° tiltable | Electrical Safety Class  | : Class II                                                |
| Cut-Out [mm]             | : Ø 155mm                          | Optic                    | : Facet Anodized Aluminum<br>Reflector 15°, 30°, 45°, 60° |
| CCT [K]                  | : 2700K - 5700K                    | Mains Voltage [VAc]      | : 220-240V / 50-60Hz                                      |
| CRI [Ra]                 | : max. [RA] >98                    | Ambient Temperature [°C] | : 35°C                                                    |
| Chromaticity Tolerance   | : 3                                | Ingress Protection [IP]  | : IP20                                                    |
| Luminous Flux [lm]       | : max. 4500lm                      | Net Weight [kg]          | : 0.88kg                                                  |
| System Power [W]         | : max. 38.5W                       | Warranty [Y]             | : 5 years                                                 |
| System Efficiency [lm/W] | : max. 137lm/W                     |                          |                                                           |

Go to full specs



HISTORY OF LIGHTING | HALLWAY