


SKADI TR.



REACHING YOUR GOAL.

This is the track version of the surface mounted downlight Skadi. Thanks to a wide selection of lighting techniques, light colours (retail colours, spectral LED and infinity LED), optics, accessories and mounting options, Skadi can be used for many different lighting purposes. The dimming and control options, such as dim to warm, tunable white, Casambi and Dali help create the right ambience at any time of the day.

SKADI 160 TR.

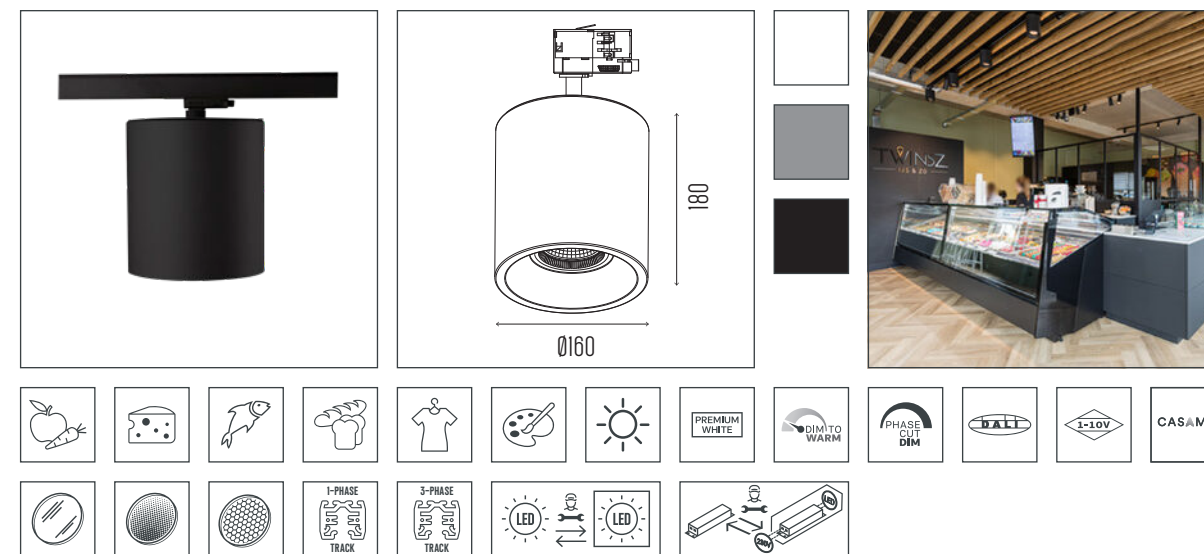


CCT [K]	: 2700K - 5700K	Optic	: Facet Anodized Aluminum Reflector 15°, 30°, 45°, 55°
CRI [Ra]	: max. [RA] >98	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 3	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 2500lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 18.5W	Net Weight [kg]	: 1.20kg
System Efficiency [lm/W]	: max. 137lm/W	Warranty [Y]	: 5 years
Electrical Safety Class	: Class I		

[Go to full specs](#)



SKADI 160 TR HE.

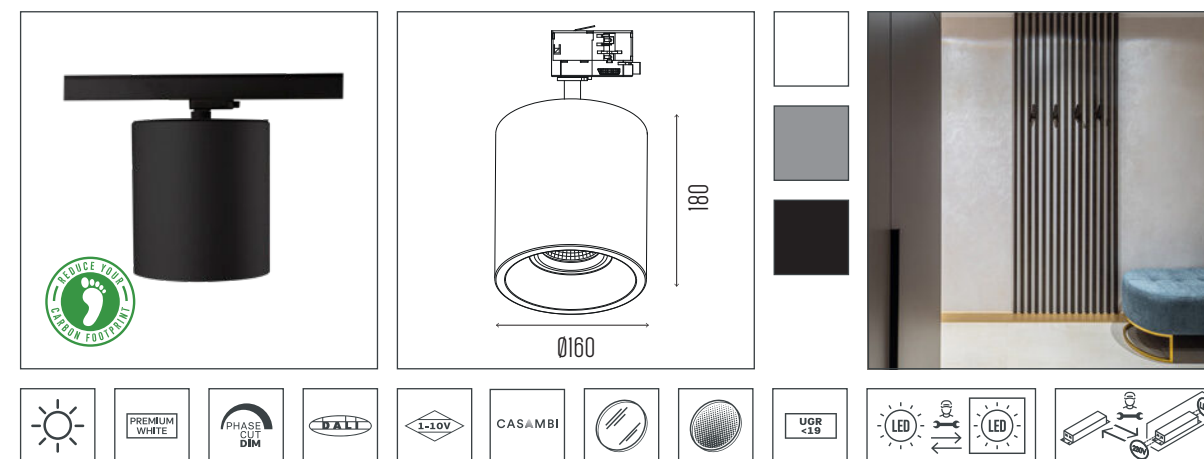


CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4000K PW	Optic	: Facet Metalized Reflector 15°, 25°, 45°, 60°
CRI [Ra]	: max. [RA] >98	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 2	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 2900lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 19W	Net Weight [kg]	: 1.20kg
System Efficiency [lm/W]	: max. 157lm/W	Warranty [Y]	: 5 years
Electrical Safety Class	: Class I		

[Go to full specs](#)




SKADI 220 TR.

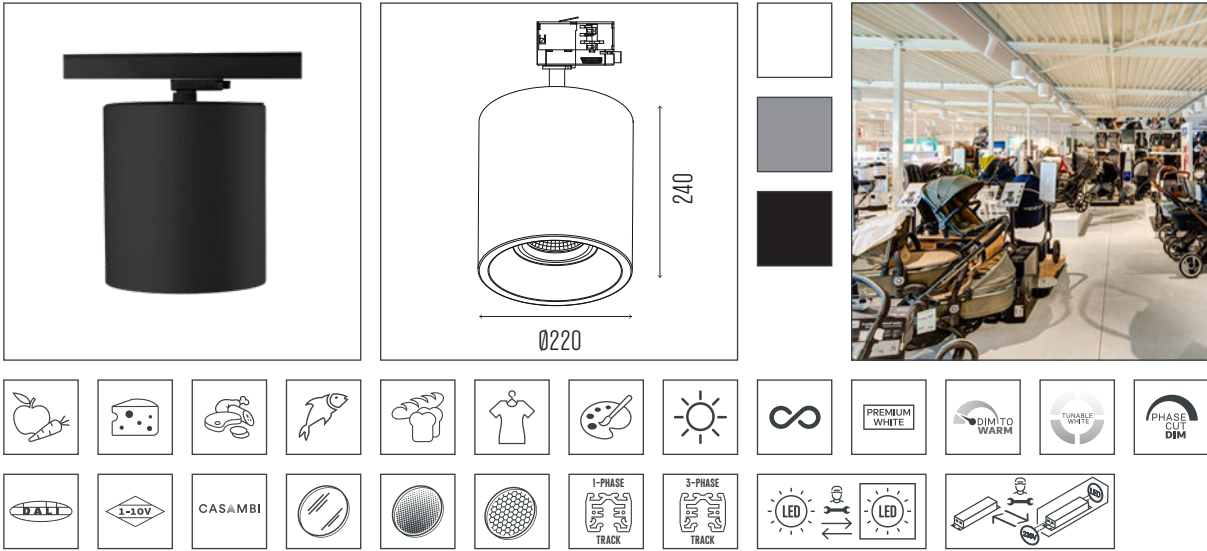

CCT [K]	: 2700K - 5700K	Optic	: Facet Anodized Aluminum
CRI [Ra]	: max. [RA] >98	Reflector	: 15°, 30°, 45°, 60°
Chromaticity Tolerance	: 3	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Luminous Flux [lm]	: max. 4500lm	Ambient Temperature [°C]	: 35°C
System Power [W]	: max. 38.5W	Ingress Protection [IP]	: IP20
System Efficiency [lm/W]	: max. 137lm/W	Net Weight [kg]	: 1.70kg
Electrical Safety Class	: Class I	Warranty [Y]	: 5 years



SKADI 220 TR HE.

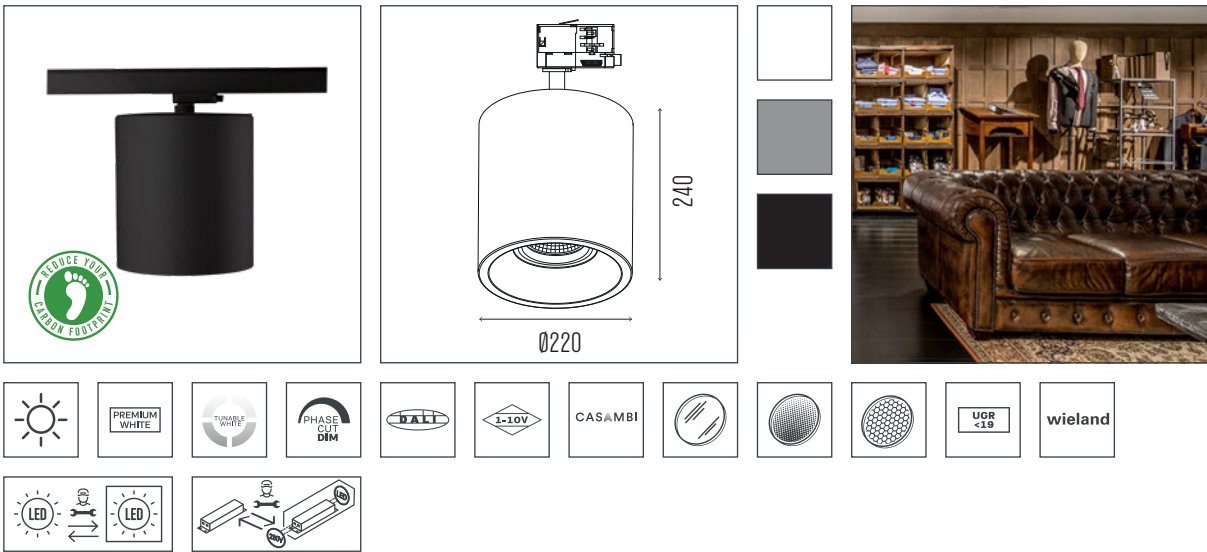

CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4000K PW	Optic	: Facet Metalized Reflector
CRI [Ra]	: max. [RA] >98	Reflector	: 20°, 30°, 40°, 60°
Chromaticity Tolerance	: 2	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Luminous Flux [lm]	: max. 5200lm	Ambient Temperature [°C]	: 35°C
System Power [W]	: max. 40W	Ingress Protection [IP]	: IP20
System Efficiency [lm/W]	: max. 157lm/W	Net Weight [kg]	: 1.70kg
Electrical Safety Class	: Class I	Warranty [Y]	: 5 years

