

SURT.

This track spot is a permanent fixture in flexible lighting plans. The step-less adjustable beam angle from 15° to 60° and the possibility of dimming within a range of 10-100% (with a potentiometer on the rear) gives you the freedom to choose the light level without any control system. Perfect for use at trade fairs, exhibitions or in your shop windows.




Adjustability	: 355° rotational and 90° tiltable	Optic	: Zoom Lens 15°-60°
CCT [K]	: 3000K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: [Ra] >90	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 2150lm	Net Weight [kg]	: 1.10kg
System Power [W]	: 29W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 74lm/W	Details	: Direct Potentiometer
Electrical Safety Class	: Class I	Dimming	

Go to full specs



VALI.

The VALI is an exceptional track luminaire designed for dual use: as a contour spotlight or a GOBO projector for logos, pictures, or pictograms. In its role as a contour spotlight, the VALI excels in shaping light with precision, offering a variety of forms and sizes, making it ideal for accentuating wall-mounted art or objects.

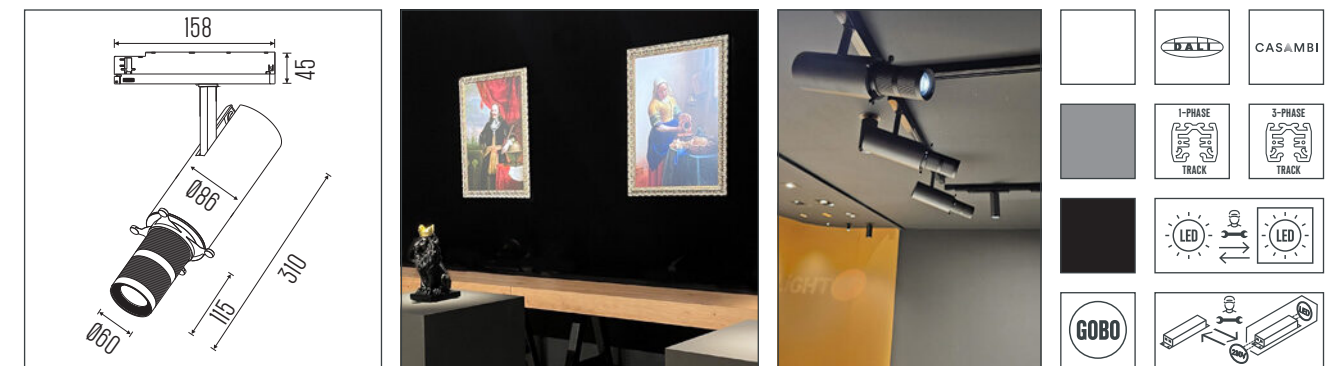

Adjustability	: 350° rotational and 90° tiltable	Optic	: Lens 25°-35°
CCT [K]	: 3000K - 4000K		: Circular, Square, Rectangular
CRI [Ra]	: [Ra] >90	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 3	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 1150lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 32W	Net Weight [kg]	: 1.70kg
System Efficiency [lm/W]	: max. 36lm/W	Warranty [Y]	: 5 years
Electrical Safety Class	: Class II		

Go to full specs

