


WEDA.



SAVINGS AND SOLUTIONS, PERFECTLY ALIGNED.

The Weda HE delivers all you need for outstanding retail lighting. Discover the full potential of this top model. Experience superior lm/W performance with improved color stability. Tailor the lighting to your project by selecting from a wide range of beam angles, light distribution options, and accessories. Everything you need for perfect lighting is available from the same line.

WEDA HE.

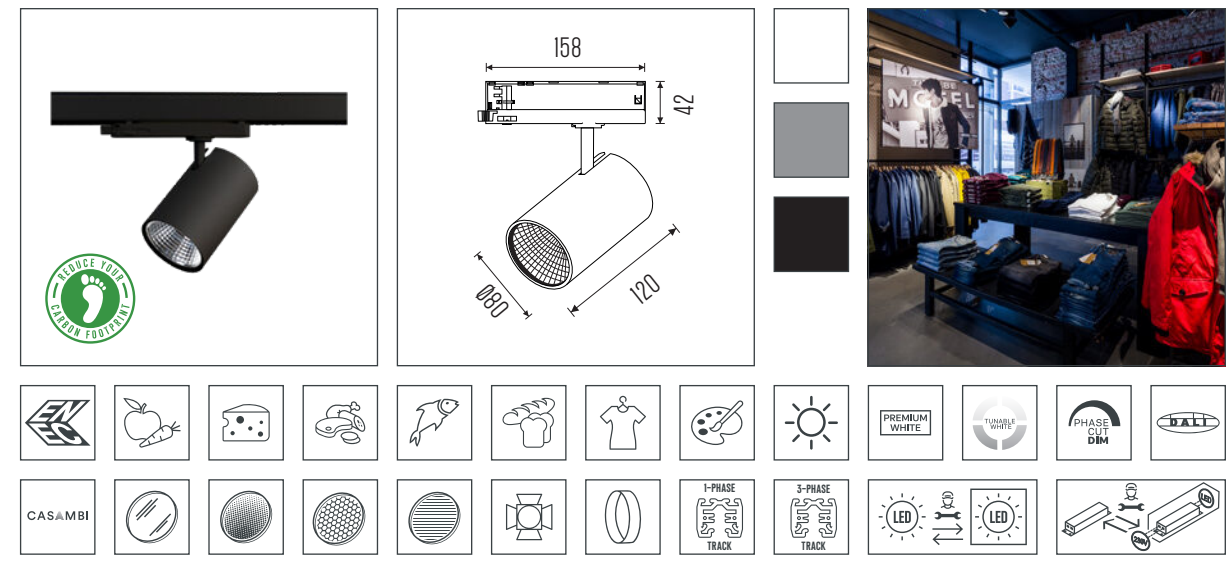


Adjustability	: 350° rotational and 90° tiltable	Electrical Safety Class	: Class II
CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4500K PW	Optic	: Facet Anodized Aluminum Reflector 15°, 24°, 45°, 55°
CRI [Ra]	: max. [RA] >98	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 3	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 2500lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 18.5W	Net Weight [kg]	: 0.65kg
System Efficiency [lm/W]	: max. 130lm/W	Warranty [Y]	: 5 years

Go to full specs



WEDA UHE.

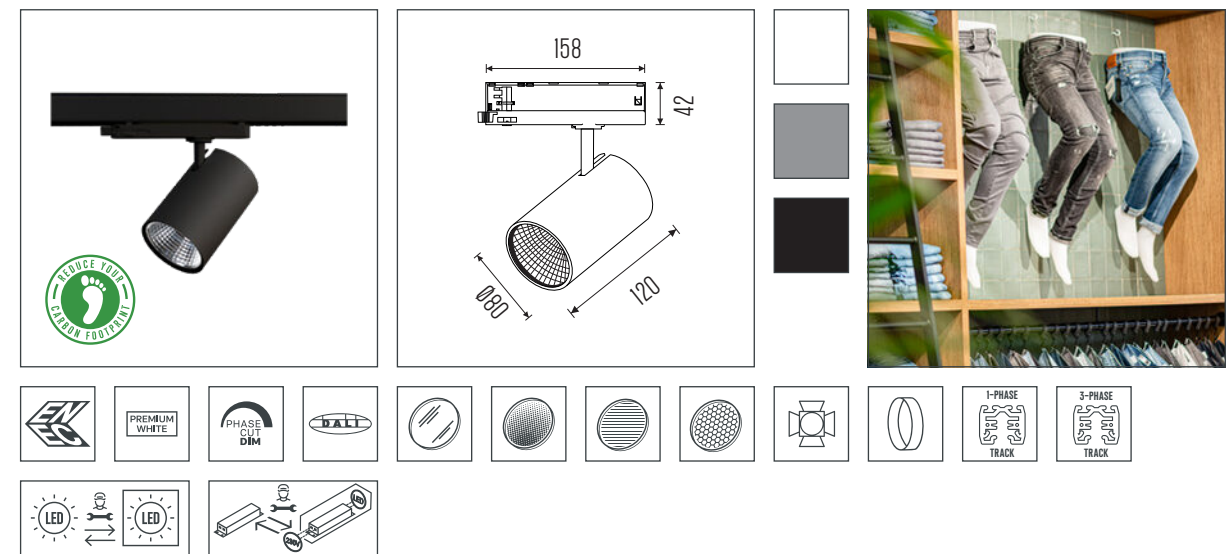


Adjustability	: 350° rotational and 90° tiltable	Electrical Safety Class	: Class II
CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4500K PW	Optic	: Facet Metalized Reflector 15°, 25°, 40°, 65°
CRI [Ra]	: [Ra] >90	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 2	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 3300lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 20.5W	Net Weight [kg]	: 0.60kg
System Efficiency [lm/W]	: max. 171lm/W	Warranty [Y]	: 5 years

Go to full specs




WEDA HE ASYMMETRIC.

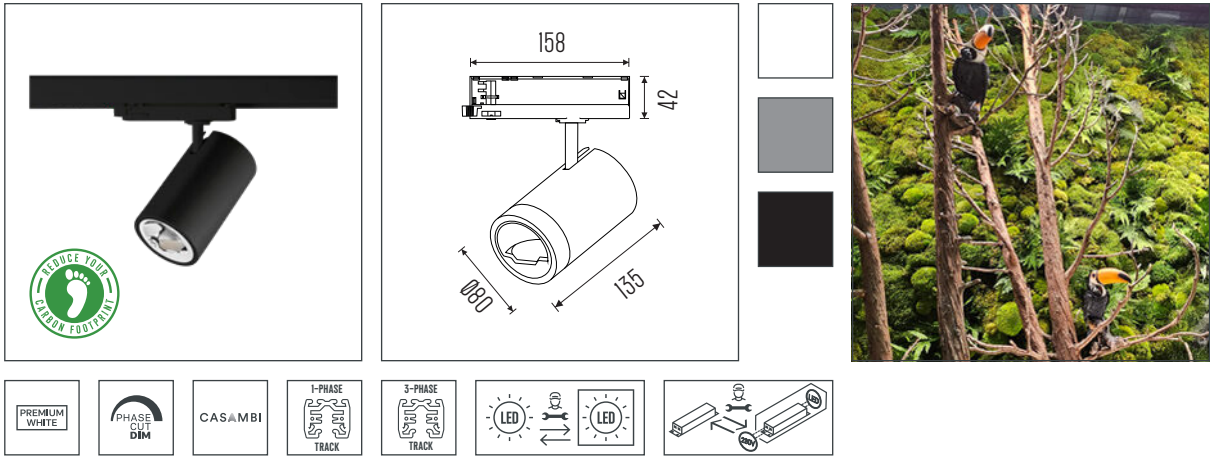

Adjustability	: 350° rotational and 90° tiltable	Optic	: Facet Metalized Reflector
CCT [K]	: 2700K, 3000K, 3500K, 4000K, 3000K PW, 3500K PW, 4500K PW	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: [Ra] >90	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 2	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 1400lm	Net Weight [kg]	: 0.60kg
System Power [W]	: max. 17.5W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 80lm/W		
Electrical Safety Class	: Class II		



WEDA HE X-FLIP.

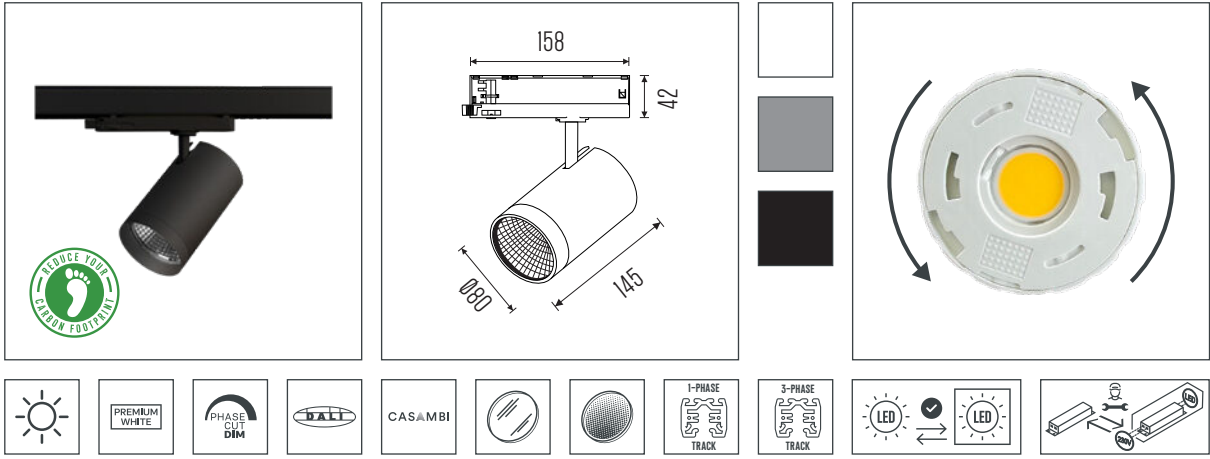

Adjustability	: 350° rotational and 90° tiltable	Optic	: Facet Metalized Reflector
CCT [K]	: 2700K, 3000K, 4000K, 3000K PW, 4000K PW	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 2	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 2750lm	Net Weight [kg]	: 0.60kg
System Power [W]	: max. 19W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 150lm/W		
Electrical Safety Class	: Class II		



"THE WORLD NEEDS MORE EFFICIENCY
AND WE CAN MAKE A CHANGE"

Niels Klijnstra, lightbuilder at Light4U

