WORLD.

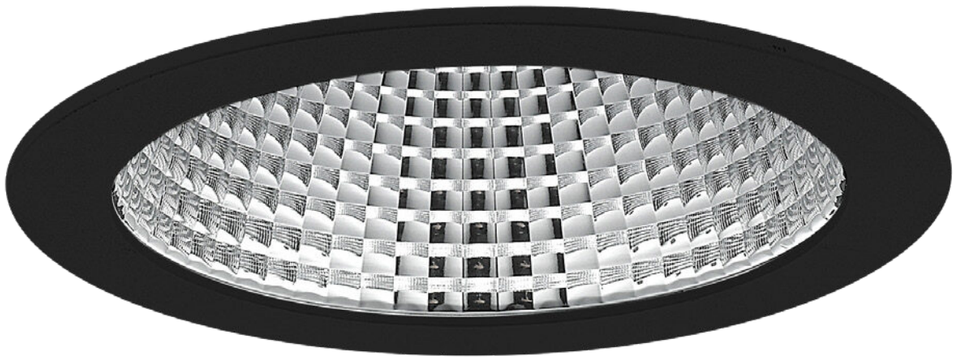

UNLIMITED POSSIBILITIES.

This universal recessed downlight has unlimited possiblities. There's a variety of sizes, light colours, control options and accessories to meet the exact requirements of the specific application. And thanks to the various sizes and different options, you can always find one that perfectly fits an existing cut-out.

WORLD 180.



Cut-Out [mm]	:	Ø170mm	Optic	:	Facet Anodized Aluminum Reflector 50°
CCT [K]	:	2700K - 5700K			
CRI [Ra]	:	max. [RA] >98	Mains Voltage [VAc]	:	220-240V / 50-60Hz
Chromaticity Tolerance	:	3	Ambient Temperature [°C]	:	35°C
Luminous Flux [lm]	:	max. 4650lm	Ingress Protection [IP]	:	IP20
System Power [W]	:	max. 38.5W	Net Weight [kg]	:	1.00kg
System Efficiency [lm/W]	:	max. 142lm/W	Warranty [Y]	:	5 years
Electrical Safety Class	:	Class II			

Go to full specs

WORLD 200.





Cut-Out [mm]	:	Ø190mm	Optic	:	Facet Anodized Aluminum Reflector 50°
CCT [K]	:	2700K - 5700K			
CRI [Ra]	:	max. [RA] >98	Mains Voltage [VAc]	:	220-240V / 50-60Hz
Chromaticity Tolerance	:	3	Ambient Temperature [°C]	:	35°C
Luminous Flux [lm]	:	max. 4700lm	Ingress Protection [IP]	:	IP20
System Power [W]	:	max. 38.5W	Net Weight [kg]	:	1.20kg
System Efficiency [lm/W]	:	max. 145lm/W	Warranty [Y]	:	5 years
Electrical Safety Class	:	Class II			

Go to full specs

WORLD 225.



Cut-Out [mm]	:	Ø210mm
CCT [K]	:	2700K - 5700K
CRI [Ra]	:	max. [RA] >98
Chromaticity Tolerance	:	3
Luminous Flux [lm]	:	max. 4700lm
System Power [W]	:	max. 38.5W
System Efficiency [lm/W]	:	max. 145lm/W
Electrical Safety Class	:	Class II

Optic	:	Facet Anodized Aluminum Reflector 50°
Mains Voltage [VAc]	:	220-240V / 50-60Hz
Ambient Temperature [°C]	:	35°C
Ingress Protection [IP]	:	IP20
Net Weight [kg]	:	1.20kg
Warranty [Y]	:	5 years

Go to full specs

WORLD 260.



Cut-Out [mm]	:	Ø240mm
CCT [K]	:	2700K - 5700K
CRI [Ra]	:	max. [RA] >98
Chromaticity Tolerance	:	3
Luminous Flux [lm]	:	max. 4700lm
System Power [W]	:	max. 38.5W
System Efficiency [lm/W]	:	max. 145lm/W
Electrical Safety Class	:	Class II

Optic	:	Facet Anodized Aluminum Reflector 80°
Mains Voltage [VAc]	:	220-240V / 50-60Hz
Ambient Temperature [°C]	:	35°C
Ingress Protection [IP]	:	IP20
Net Weight [kg]	:	1.30kg
Warranty [Y]	:	5 years

Go to full specs

#LIGHTBUILDERS | FACTORY FLOOR