


WORLD.



WORLD 180.

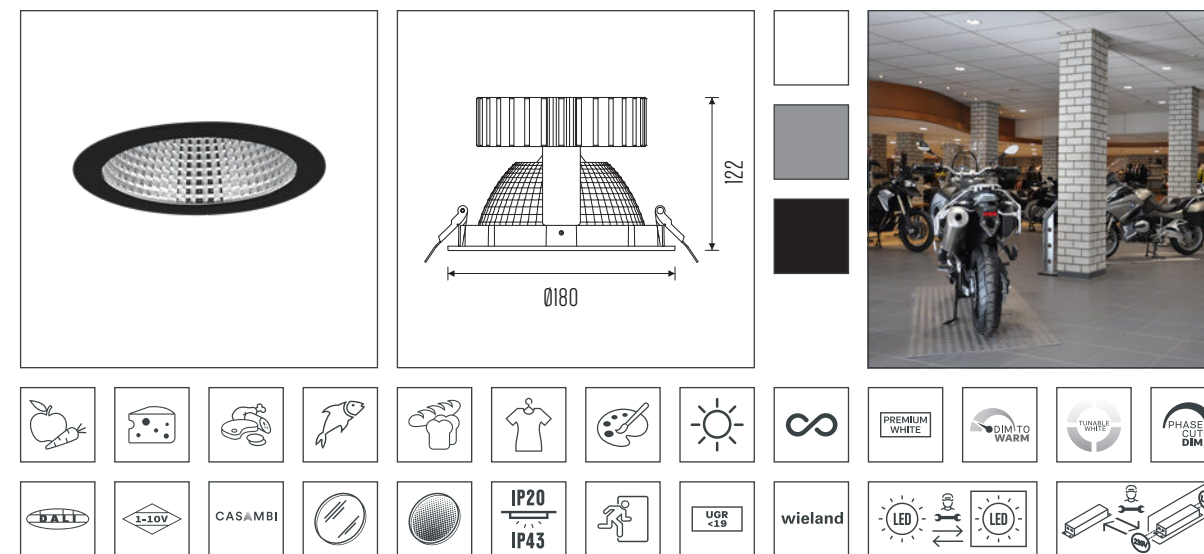


Cut-Out [mm]	: Ø170mm	Optic	: Facet Anodized Aluminum Reflector 50°
CCT [K]	: 2700K - 5700K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 4650lm	Net Weight [kg]	: 1.00kg
System Power [W]	: max. 38.5W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 142lm/W		
Electrical Safety Class	: Class II		

Go to full specs



WORLD 200.

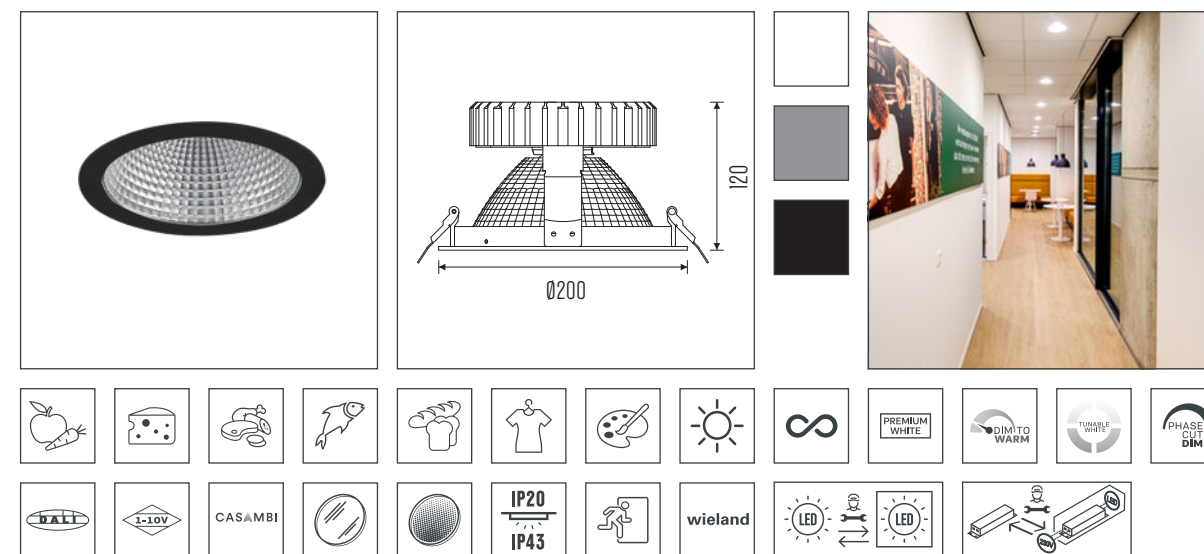

Cut-Out [mm]	: Ø190mm	Optic	: Facet Anodized Aluminum Reflector 50°
CCT [K]	: 2700K - 5700K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 4700lm	Net Weight [kg]	: 1.20kg
System Power [W]	: max. 38.5W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 145lm/W		
Electrical Safety Class	: Class II		


Go to full specs



UNLIMITED POSSIBILITIES.

This universal recessed downlight has unlimited possibilities. There's a variety of sizes, light colours, control options and accessories to meet the exact requirements of the specific application. And thanks to the various sizes and different options, you can always find one that perfectly fits an existing cut-out.


WORLD 225.

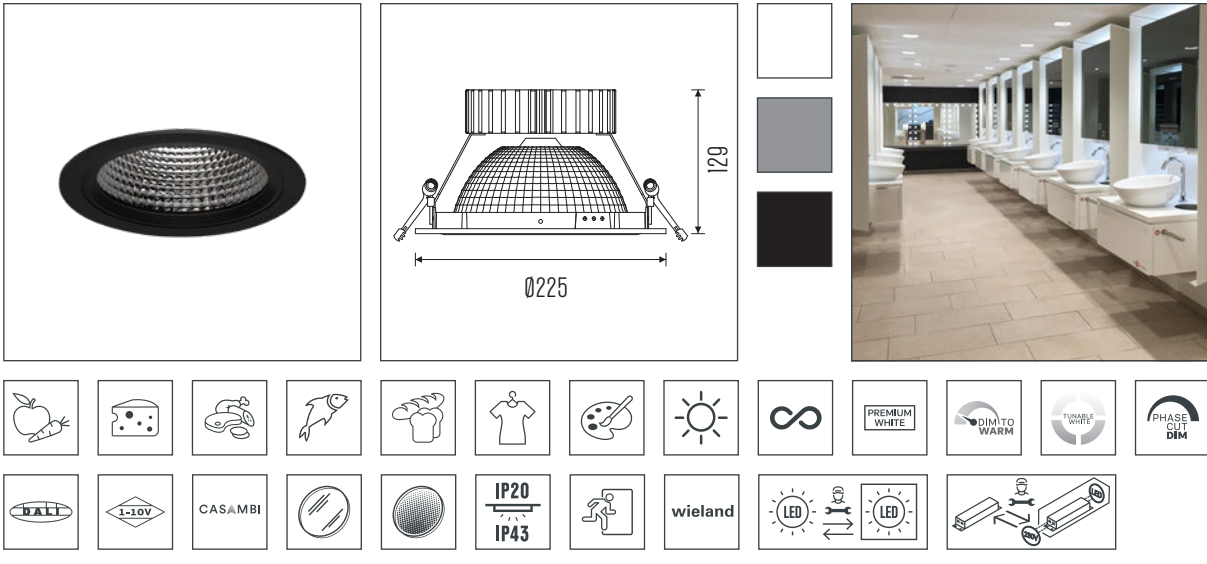

Cut-Out [mm]	: Ø210mm	Optic	: Facet Anodized Aluminum Reflector 50°
CCT [K]	: 2700K - 5700K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 4700lm	Net Weight [kg]	: 1.20kg
System Power [W]	: max. 38.5W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 145lm/W		
Electrical Safety Class	: Class II		



WORLD 260.

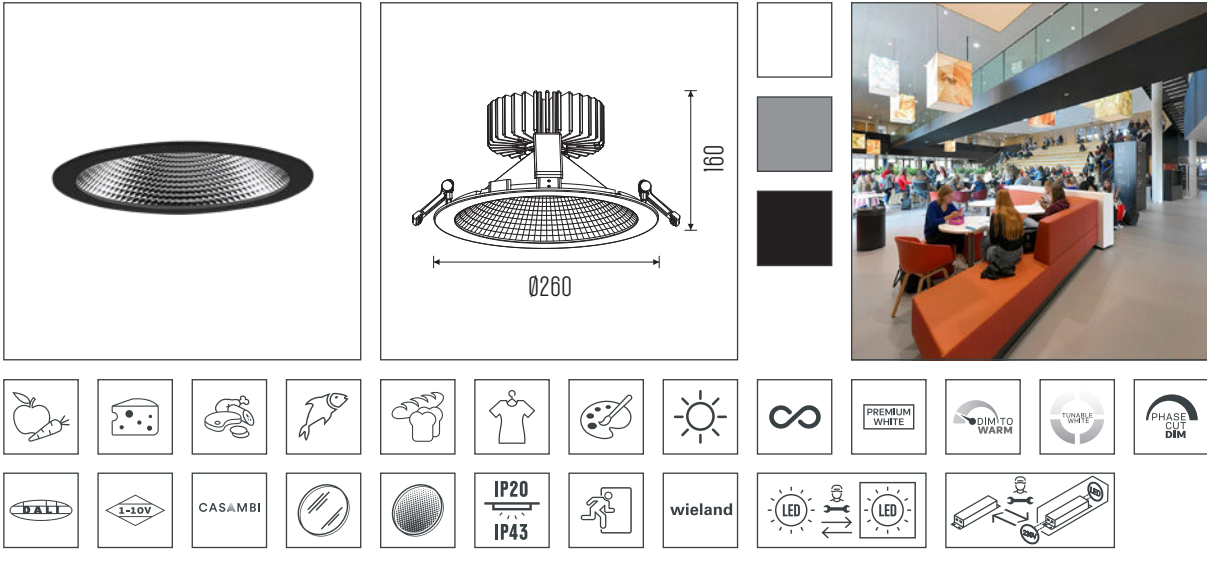

Cut-Out [mm]	: Ø240mm	Optic	: Facet Anodized Aluminum Reflector 80°
CCT [K]	: 2700K - 5700K	Mains Voltage [VAc]	: 220-240V / 50-60Hz
CRI [Ra]	: max. [RA] >98	Ambient Temperature [°C]	: 35°C
Chromaticity Tolerance	: 3	Ingress Protection [IP]	: IP20
Luminous Flux [lm]	: max. 4700lm	Net Weight [kg]	: 1.30kg
System Power [W]	: max. 38.5W	Warranty [Y]	: 5 years
System Efficiency [lm/W]	: max. 145lm/W		
Electrical Safety Class	: Class II		



#LIGHTBUILDERS | FACTORY FLOOR