


# BRYAN PENDANT.



## ROBUST AND EFFECTIVE.

This robust, industrial pendant luminaire is produced for efficient and high-output accent lighting in retail and showroom settings. Display the colours of your products very accurately by choosing from a wide variety of retail colours or spectral LED. The luminaire can be supplied with a reflector made of aluminium (Ø325mm) or clear polycarbonate (Ø315mm, Ø410mm on request). Supplied with a 3m suspension set.

## BRYAN PENDANT ALUMINIUM.

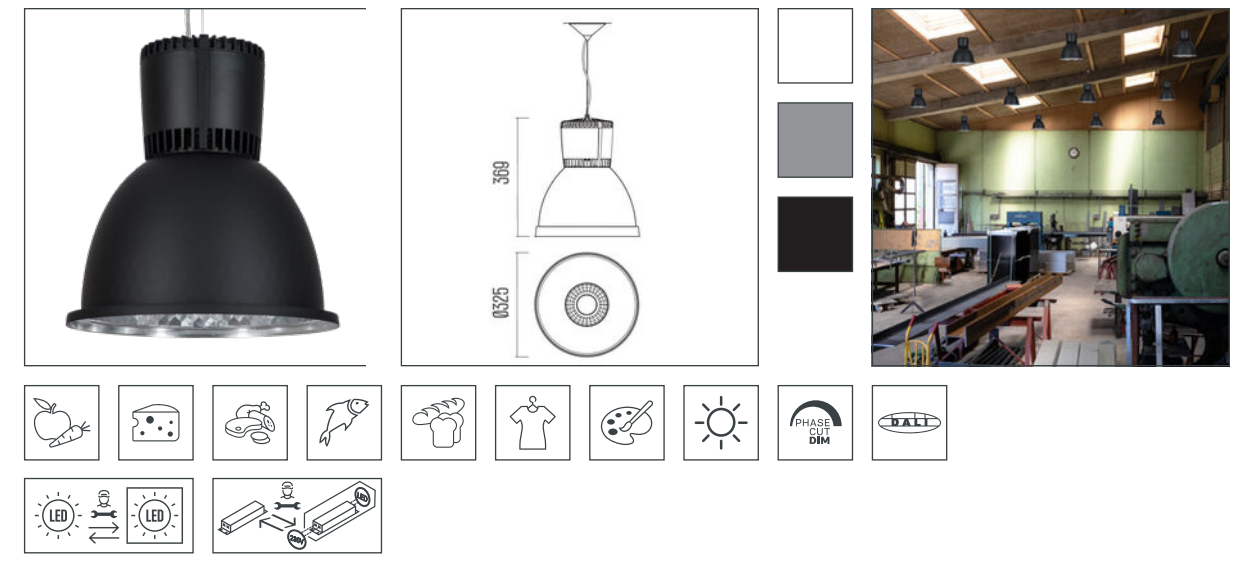


CCT [K]	: 2700K - 5700K	Optic	: Facet Anodized Aluminum Reflector 40°
CRI [Ra]	: max. [RA] >98	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 3	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 5600lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 45W	Net Weight [kg]	: 3.20kg
System Efficiency [lm/W]	: max. 135lm/W	Warranty [Y]	: 5 years
Electrical Safety Class	: Class I		

Go to full specs



## BRYAN PENDANT CLEAR POLYCARBONATE.

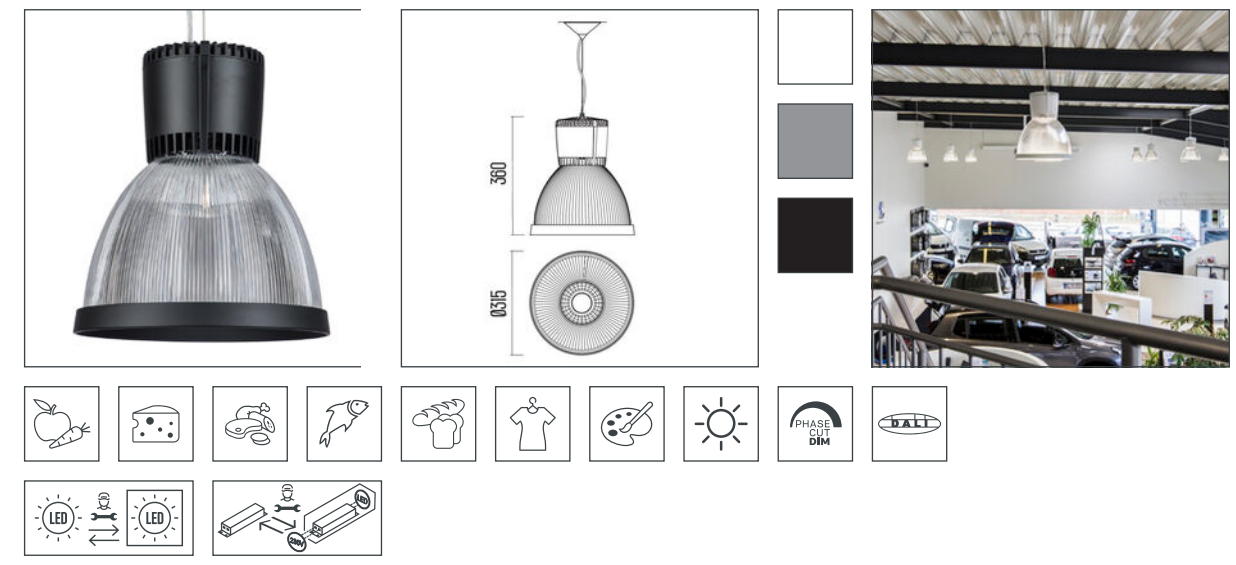

CCT [K]	: 2700K - 5700K	Optic	: Facet Anodized Aluminum Reflector 40°
CRI [Ra]	: max. [RA] >98	Mains Voltage [VAc]	: 220-240V / 50-60Hz
Chromaticity Tolerance	: 3	Ambient Temperature [°C]	: 35°C
Luminous Flux [lm]	: max. 5600lm	Ingress Protection [IP]	: IP20
System Power [W]	: max. 45W	Net Weight [kg]	: 3.20kg
System Efficiency [lm/W]	: max. 135lm/W	Warranty [Y]	: 5 years
Electrical Safety Class	: Class I		

Go to full specs

