
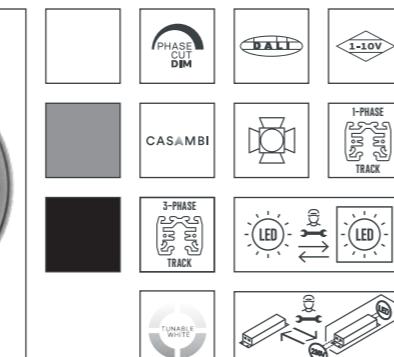


SURT.

This track spot is a permanent fixture in flexible lighting plans. The step-less adjustable beam angle from 15° to 60° and the possibility of dimming within a range of 10-100% (with a potentiometer on the rear) gives you the freedom to choose the light level without any control system. Perfect for use at trade fairs, exhibitions or in your shop windows.

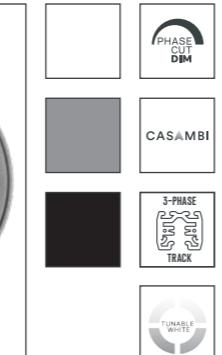



Adjustability	: 355° rotational and 90° tiltable
CCT [K]	: 2700K, 3000K, 4000K, TW
CRI [Ra]	: [Ra] >90
Chromaticity Tolerance	: 3
Luminous Flux [lm]	: max. 2150lm
System Power [W]	: 29W
System Efficiency [lm/W]	: max. 74lm/W
Electrical Safety Class	: Class I

Optic	: Zoom Lens 15°-60°
Mains Voltage [VAc]	: 220-240V / 50-60Hz
Ambient Temperature [°C]	: 35°C
Ingress Protection [IP]	: IP20
Net Weight [kg]	: 1.10kg
Warranty [Y]	: 5 years
Details	: Direct Potentiometer Dimming, DALI, Phase-cut, Casambi



VALI.

The VALI is an exceptional track luminaire designed for dual use: as a contour spotlight or a GOBO projector for logos, pictures, or pictograms. In its role as a contour spotlight, the VALI excels in shaping light with precision, offering a variety of forms and sizes, making it ideal for accentuating wall-mounted art or objects.

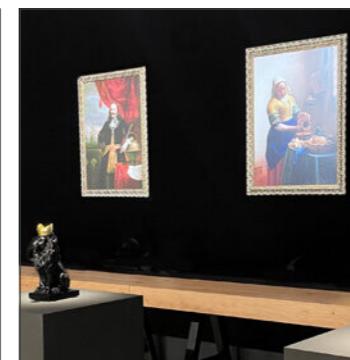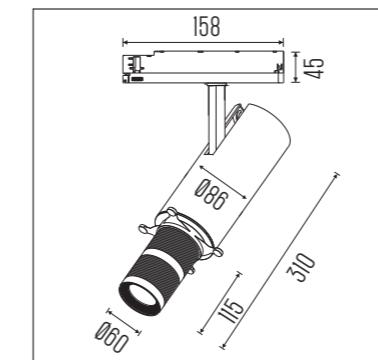

Adjustability	: 350° rotational and 90° tiltable
CCT [K]	: 3000K - 4000K
CRI [Ra]	: [Ra] >90
Chromaticity Tolerance	: 3
Luminous Flux [lm]	: max. 1150lm
System Power [W]	: max. 32W
System Efficiency [lm/W]	: max. 36lm/W
Electrical Safety Class	: Class II

